



Check list: Safety relays PNOZ X – PNOZsigma

Application examples with terminal comparison

pilz

Why does Pilz offer more?



Weil Ganzheitlichkeit unser Leistungsspektrum für Sie auszeichnet.



Pilz is a solution supplier for all automation functions. Including standard control functions. Developments from Pilz protect man, machine and the environment. That's why all our experience and knowledge goes into individual products as well as consistently sophisticated system solutions.

- ▶ Sensor technology
- ▶ Control and communication
- ▶ Motion Control
- ▶ Operating and monitoring
- ▶ Software
- ▶ Consulting and Engineering
- ▶ Training

Appropriate services relating to individual components and independent generic services guarantee that our customers obtain customised automation solutions, all from one source.

You can find more details about Pilz and your products and services on the Internet:

- ▶ www.pilz.com

Pilz is a family business that's closer to its customers

Pilz has a tradition as a family-run company stretching back 60 years. Real proximity to customers is visible in all areas, instilling confidence through individual consultation, flexibility and reliable service.

We are your contact, guide and competency leader en route to an optimum automation solution.

Support – Technical help round the clock!

Technical support is available from Pilz round the clock. This service is provided free of charge beyond standard business hours.

You can reach our international hotline on:

- ▶ +49 711 3409-444

Exclusion of liability

We have taken great care in compiling our check list. All statements are made in accordance with the current status of technology and to the best of our knowledge and belief. However, we cannot except liability for the accuracy and entirety of the information provided, except in the case of gross negligence. In particular it should be noted that statements do not have the legal quality of assurances or assured properties. We are grateful for any feedback on the contents.

April 2008

All rights to this publication are reserved by Pilz GmbH & Co. KG. We reserve the right to amend specifications without prior notice. Copies may be made for the user's internal purposes. The names of products, goods and technologies used in this manual are trademarks of the respective companies.

Check list: PNOZ X – PNOZsigma	1.0
Comparison chart	1.1
Application examples with terminal comparison	2.0
Application examples	2.1
Service	3.0
Technical offices in Germany	3.1

Content	Seite
Check list: Safety relays PNOZ X – PNOZsigma	
Comparison chart	1.1-2

Check list: Safety relays PNOZ X – PNOZsigma

Comparison chart

This comparison chart makes the transfer from PNOZ X to PNOZsigma easier for the user. Safety relays from the PNOZ X product range are proven through their reliability and robustness and have developed a wide application range in the most varied of safety applications. One PNOZ is used per safety function. Sizes vary from 22.5 to 90 mm, the number of contacts from two to eight.

The new compact safety relays PNOZsigma combine Pilz's many years of experience with the very latest safety technology: With particularly narrow housing widths from 12.5 mm and multifunctionality compressed into each unit, PNOZsigma provides maximum functionality in minimum width. The PNOZsigma devices can be connected via contact expander modules.

Online information on the PNOZ safety relays can be found at www.pilz.com, Webcode 0199.

The following list is a recommendation. Check to ensure that the listed types can be used in an application. We are happy to advise you on an alternative solution for your application.
Technical Support Tel.: +49 711 3409-444
E-Mail: techsupport@pilz.de


PNOZ X	Supply voltage	Replacement type PNOZsigma	+ Required expansion device PNOZsigma
PNOZ X1(P)	24 V DC	PNOZ s2	
PNOZ X2(P)	24 V DC	PNOZ s3	
PNOZ X2(P)	48 - 240 V AC/DC	PNOZ s4 AC	
PNOZ X2.1	24 V DC	PNOZ s3	
PNOZ X2.2	24 V DC	PNOZ s3	
PNOZ X2.3(P)	24 V DC	PNOZ s3	
PNOZ X2.5(P)	24 V DC	PNOZ s3	
PNOZ X2.7P	24 V DC	PNOZ s4	
PNOZ X2.7P	48 - 240 V AC/DC	PNOZ s4 AC	
PNOZ X2.8P	24 V DC	PNOZ s4	
PNOZ X2.8P	48 - 240 V AC/DC	PNOZ s4 AC	
PNOZ X2.9P	24 V DC	PNOZ s4	
PNOZ XV2(P)	24 V DC	PNOZ s5	
PNOZ XV2.1(P)	48 - 240 V AC/DC	PNOZ s5 AC	
PNOZ X3(P)	24 V DC	PNOZ s4	
PNOZ X3(P)	48 - 240 V AC/DC	PNOZ s4 AC	
PNOZ XV3(P)	24 V DC	PNOZ s5	PNOZ s7
PNOZ XV3.1(P)	24 V DC	PNOZ s5	PNOZ s7
PNOZ XV3.1(P)	48 - 240 V AC/DC	PNOZ s5 AC	PNOZ s7
PNOZ X4	24 V DC	PNOZ s4	
PNOZ X4	48 - 240 V AC	PNOZ s4 AC	
PNOZ X5	24 V DC	PNOZ s3	
PNOZ X6	24 V DC	PNOZ s4	
PNOZ X6	48 - 240 V AC	PNOZ s4 AC	
PNOZ X7(P)	24 V DC	PNOZ s1	
PNOZ X8P	24 V DC	PNOZ s4	
PNOZ X8P	48 - 240 V AC	PNOZ s4 AC	
PNOZ X9(P)	24 V DC	PNOZ s4	PNOZ s7
PNOZ X9(P)	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
PNOZ X10	24 V DC	PNOZ s4	PNOZ s7
PNOZ X10	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
PNOZ X10.1	24 V DC	PNOZ s4	PNOZ s7
PNOZ X10.1	48 - 240 V AC	PNOZ s4 AC	PNOZ s7

Comparison chart


PNOZ X	Supply voltage	Replacement type PNOZsigma	+ Required expansion device PNOZsigma
PNOZ X11P	24 V DC	PNOZ s4	PNOZ s7
PNOZ X11P	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
PNOZ X13	24 V DC	PNOZ s3	PNOZ s7
PNOZ 2VQ	24 V DC	PNOZ s5	PNOZ s9
PNOZ 1-2	24 V DC	PNOZ s4.1	
PNOZ 1-2	48 - 240 V AC	PNOZ s4.1 AC	
PNOZ 10	24 V DC	PNOZ s4	PNOZ s7
PNOZ 10	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
PNOZ 11	24 V DC	PNOZ s4	PNOZ s7
PNOZ 11	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
PNOZ 15	24 V DC	PNOZ s4	
PNOZ 16	24 V DC	PNOZ s4	
PNOZ 16	48 - 240 V AC	PNOZ s4	
PNOZ 16S(P)	24 V DC	PNOZ s3	
PNOZ 16S(P)	48 - 240 V AC	PNOZ s4 AC	
PST 4	24 V DC	PNOZ s4	PNOZ s7
PST 4	48 - 240 V AC	PNOZ s4 AC	PNOZ s7
P1HZ X1	24 V DC	PNOZ s6.1	
P2HZ X1(P)	24 V DC	PNOZ s6	
P2HZ X1(P)	48 - 240 V AC	PNOZ s6 AC	
P2HZ X3	24 V DC	PNOZ s6	
P2HZ X4P	24 V DC	PNOZ s6	
PST X2	24 V DC	PNOZ s4	

Content	Seite
Application examples with terminal comparison	
PNOZ X1/PNOZ X1P (24 V DC) – PNOZ s2	2.1-2
PNOZ X2/PNOZ X2P (24 V DC) – PNOZ s3	2.1-3
PNOZ X2/PNOZ X2P (48 - 240 V AC/DC) – PNOZ s4	2.1-4
PNOZ XV2/PNOZ XV2P (24 V DC) – PNOZ s5	2.1-5
PNOZ XV2.1/PNOZ XV2.1P (48 - 240 V AC/DC) – PNOZ s5	2.1-6
PNOZ X3/PNOZ X3P (24 V DC; 48 - 240 V AC/DC) – PNOZ s4	2.1-7
PNOZ XV3/PNOZ XV3P (24 V DC) – PNOZ s5 and PNOZ s7	2.1-8
PNOZ X4 (24 V DC; 48 - 240 V AC) – PNOZ s4	2.1-9
PNOZ X5 (24 V DC) – PNOZ s3	2.1-10
PNOZ X6 (24 V DC; 48 - 240 V AC) – PNOZ s4	2.1-11
PNOZ X7/PNOZ X7P (24 V DC) – PNOZ s1	2.1-12
PNOZ X8P (24 V DC; 48 - 240 V AC) – PNOZ s4	2.1-13
PNOZ X9/PNOZ X9P (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-14
PNOZ X10 (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-15
PNOZ X11P (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-16
PNOZ X13 (24 V DC) – PNOZ s3 and PNOZ s7	2.1-17
PNOZ 2VQ (24 V DC) – PNOZ s5 and PNOZ s9	2.1-18
PNOZ 1-2 (24 V DC; 48 - 240 V AC) – PNOZ s4.1	2.1-19
PNOZ 10 (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-20
PNOZ 11 (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-21
PNOZ 15 (24 V DC) – PNOZ s4	2.1-22
PNOZ 16 (24 V DC; 48 - 240 V AC) – PNOZ s4	2.1-23
PST 4 (24 V DC; 48 - 240 V AC) – PNOZ s4 and PNOZ s7	2.1-24
P1HZ X1 (24 V DC) – PNOZ s6.1	2.1-25
P2HZ X1/P2HZ X1P (24 V DC; 48 - 240 V AC) – PNOZ s6	2.1-26
P2HZ X3 (24 V DC) – PNOZ s6	2.1-27
P2HZ X4P (24 V DC) – PNOZ s6	2.1-28
PST X2 (24 V DC) – PNOZ s4	2.1-29


PNOZ X1/PNOZ X1P (24 V DC) – PNOZ s2

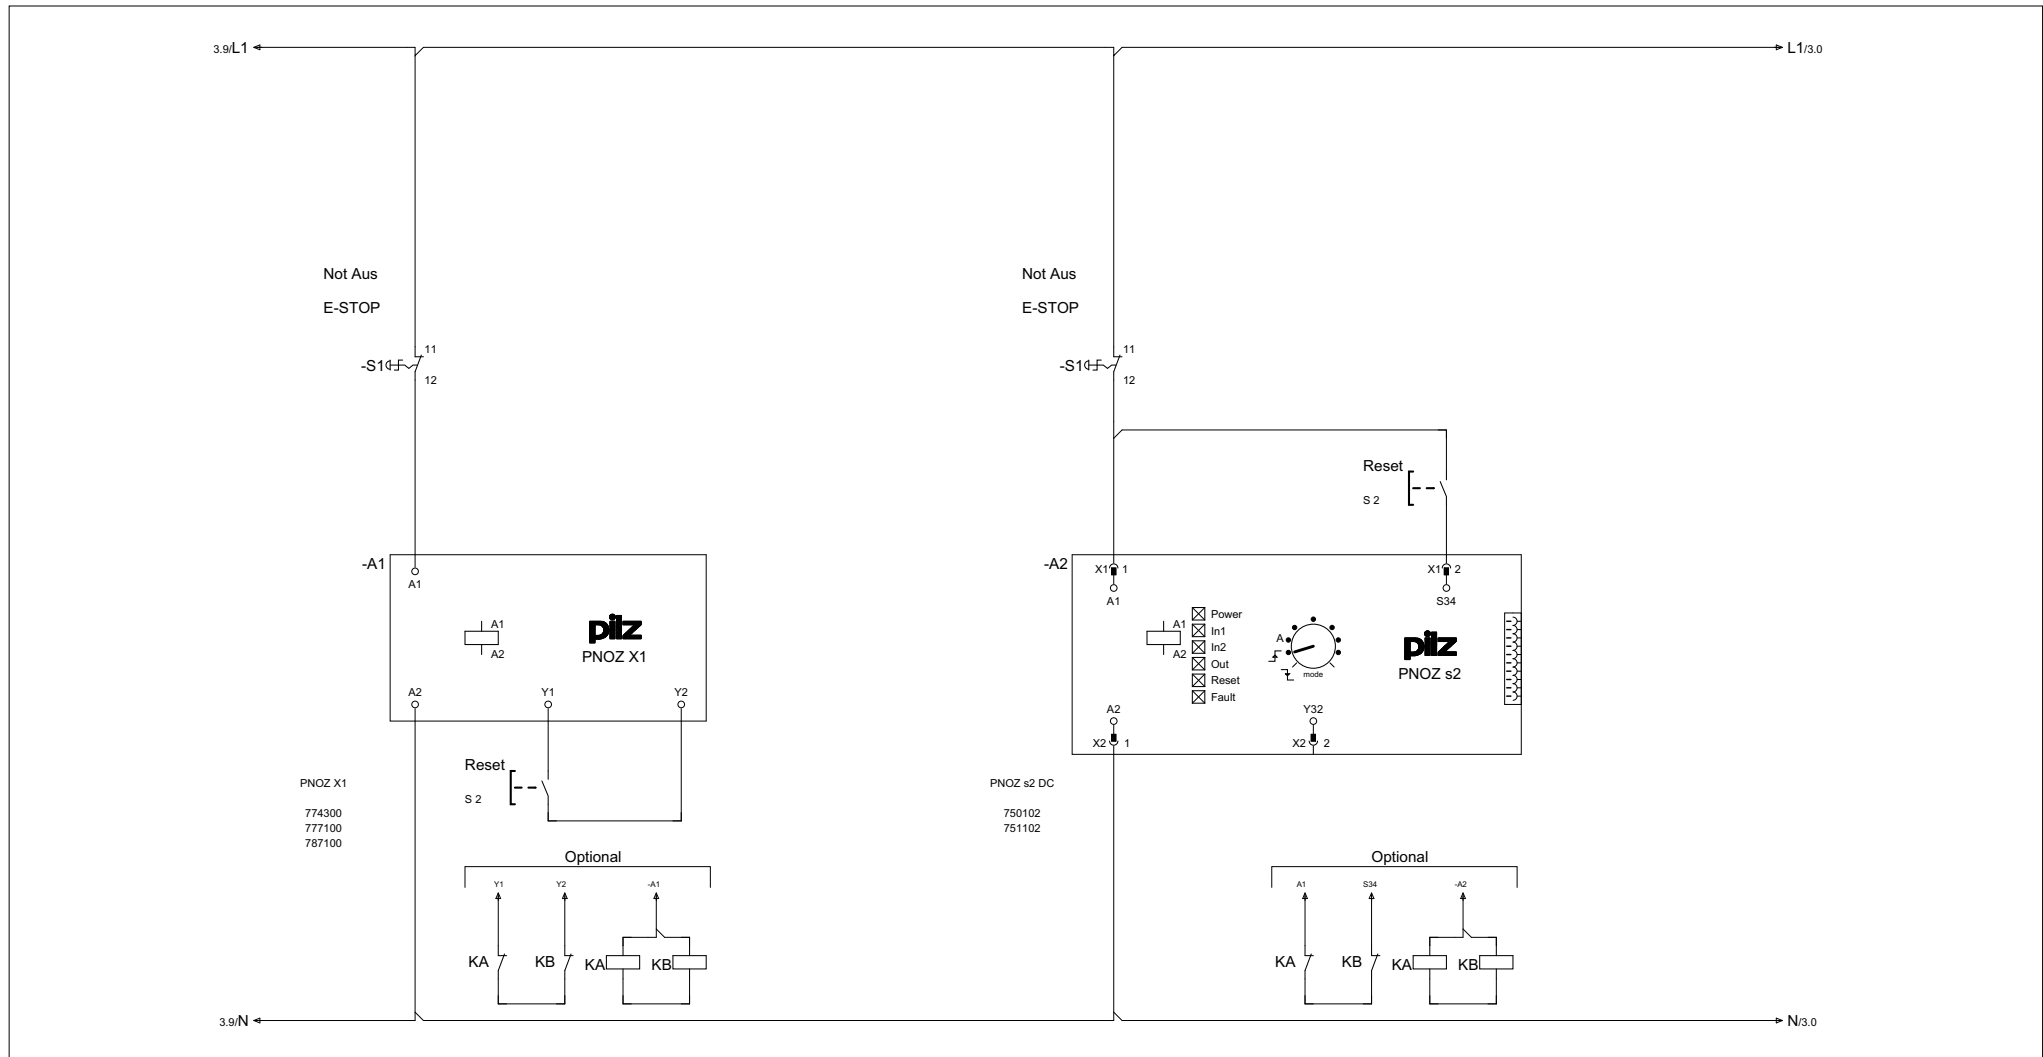


PNOZ X2/PNOZ X2P (24 V DC) – PNOZ s3

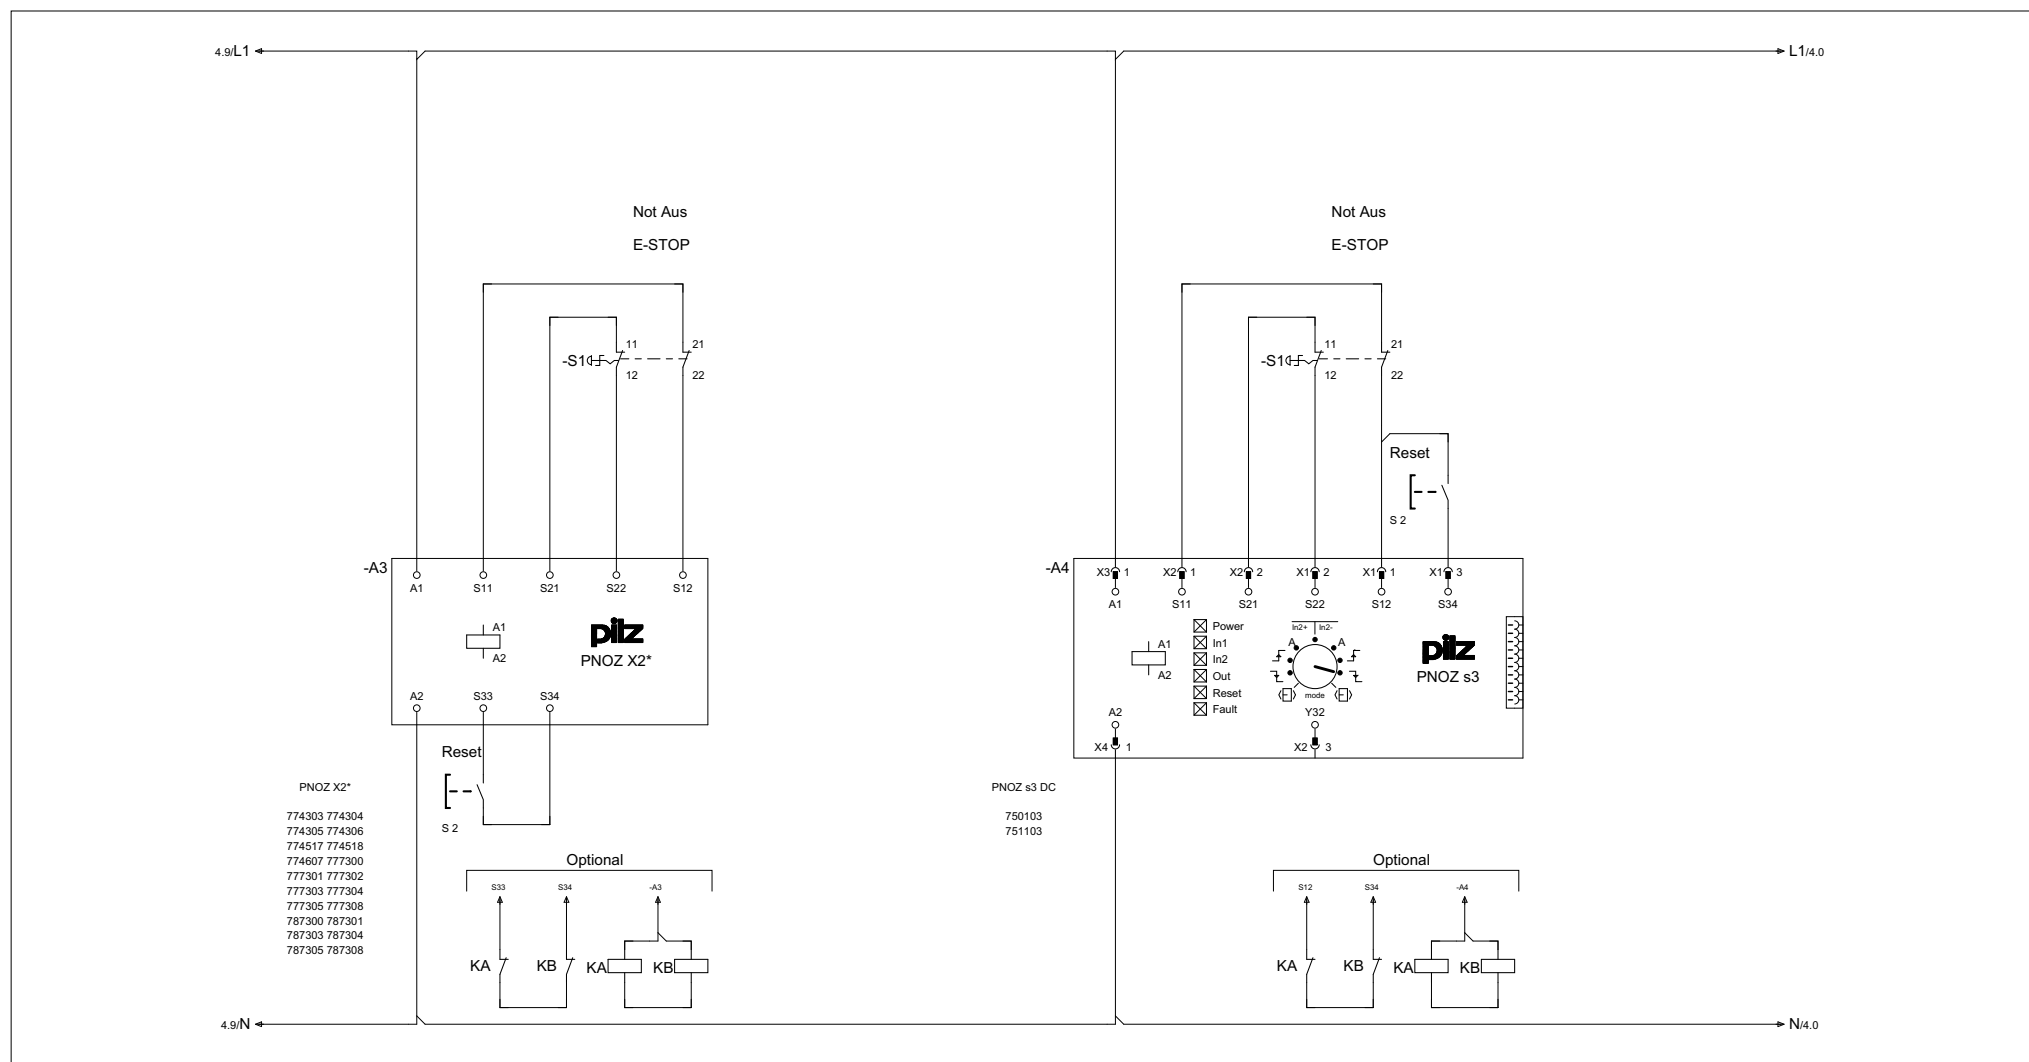


PNOZ X2/PNOZ X2P (48 - 240 V AC/DC) – PNOZ s4

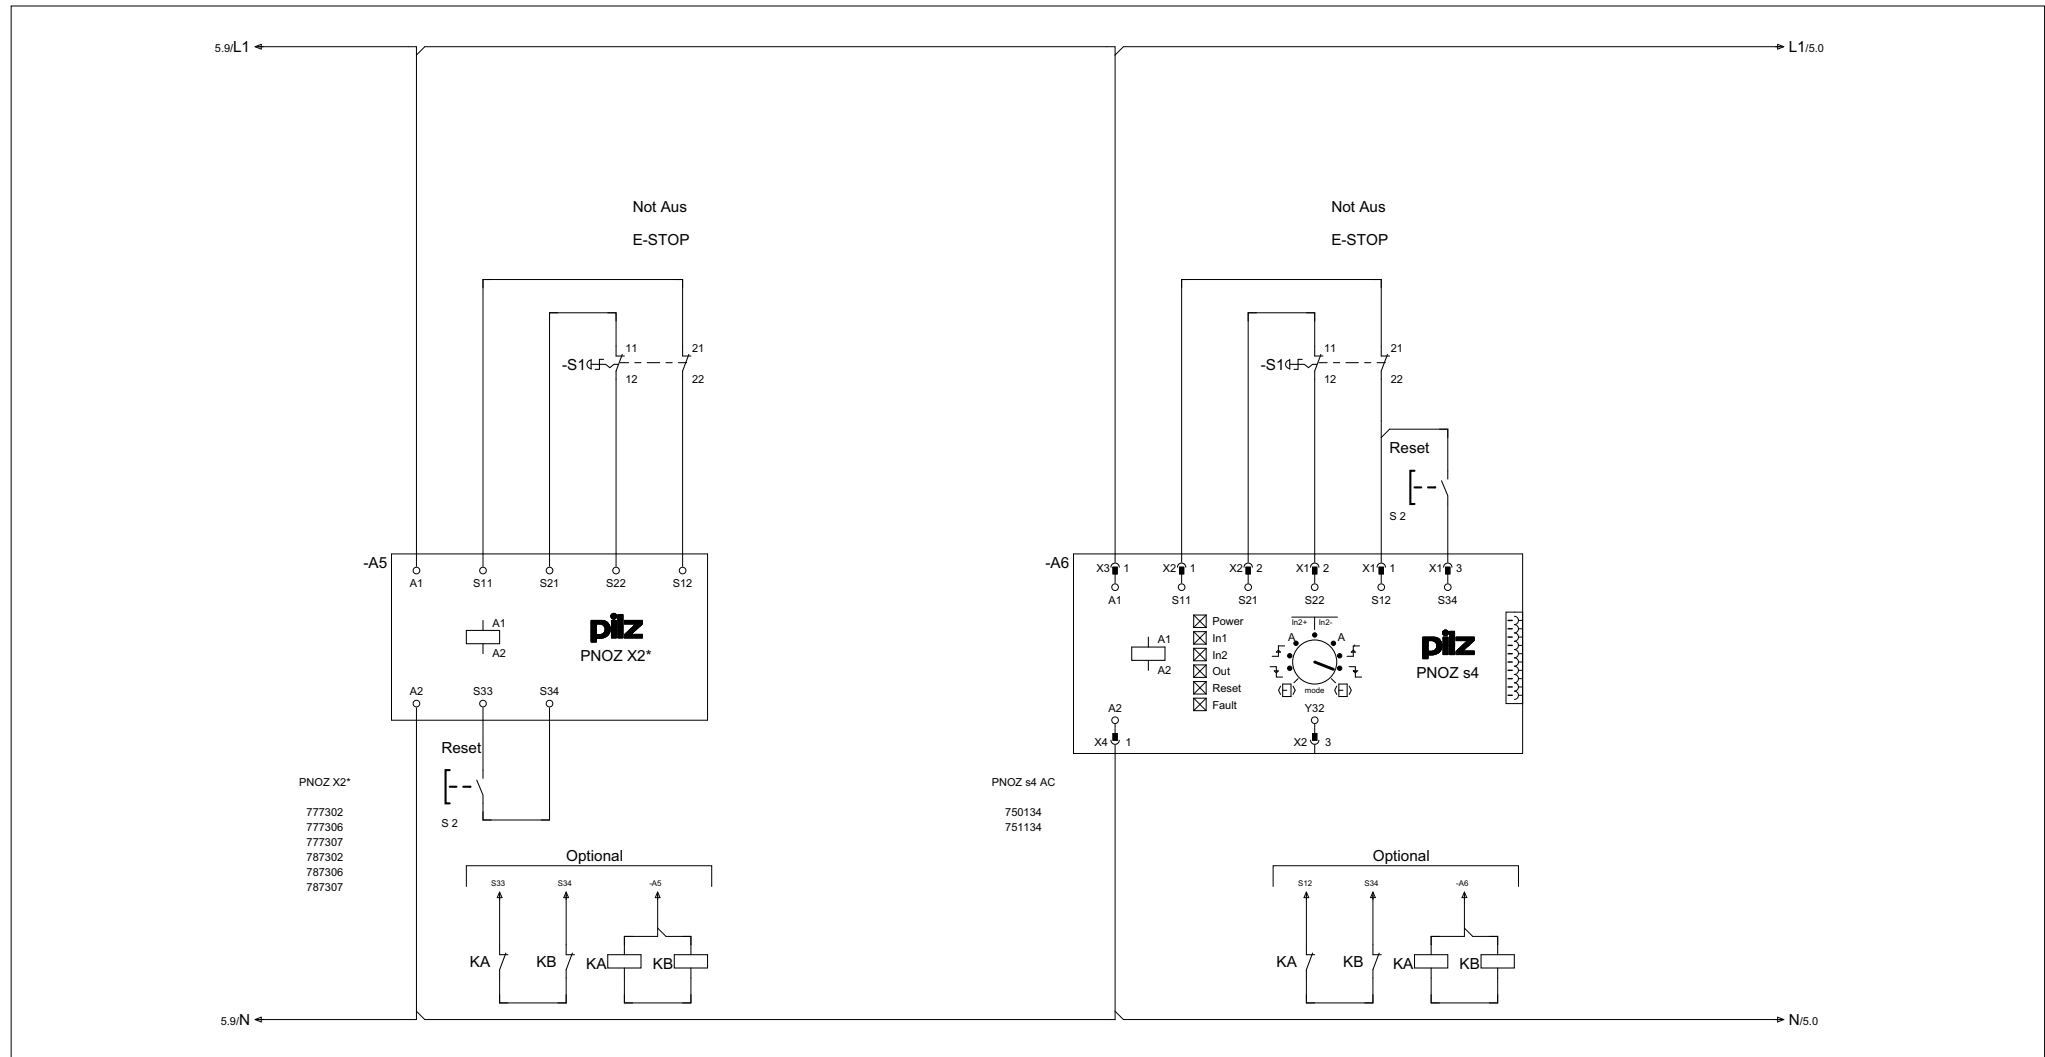


PNOZ XV2/PNOZ XV2P (24 V DC) – PNOZ s5

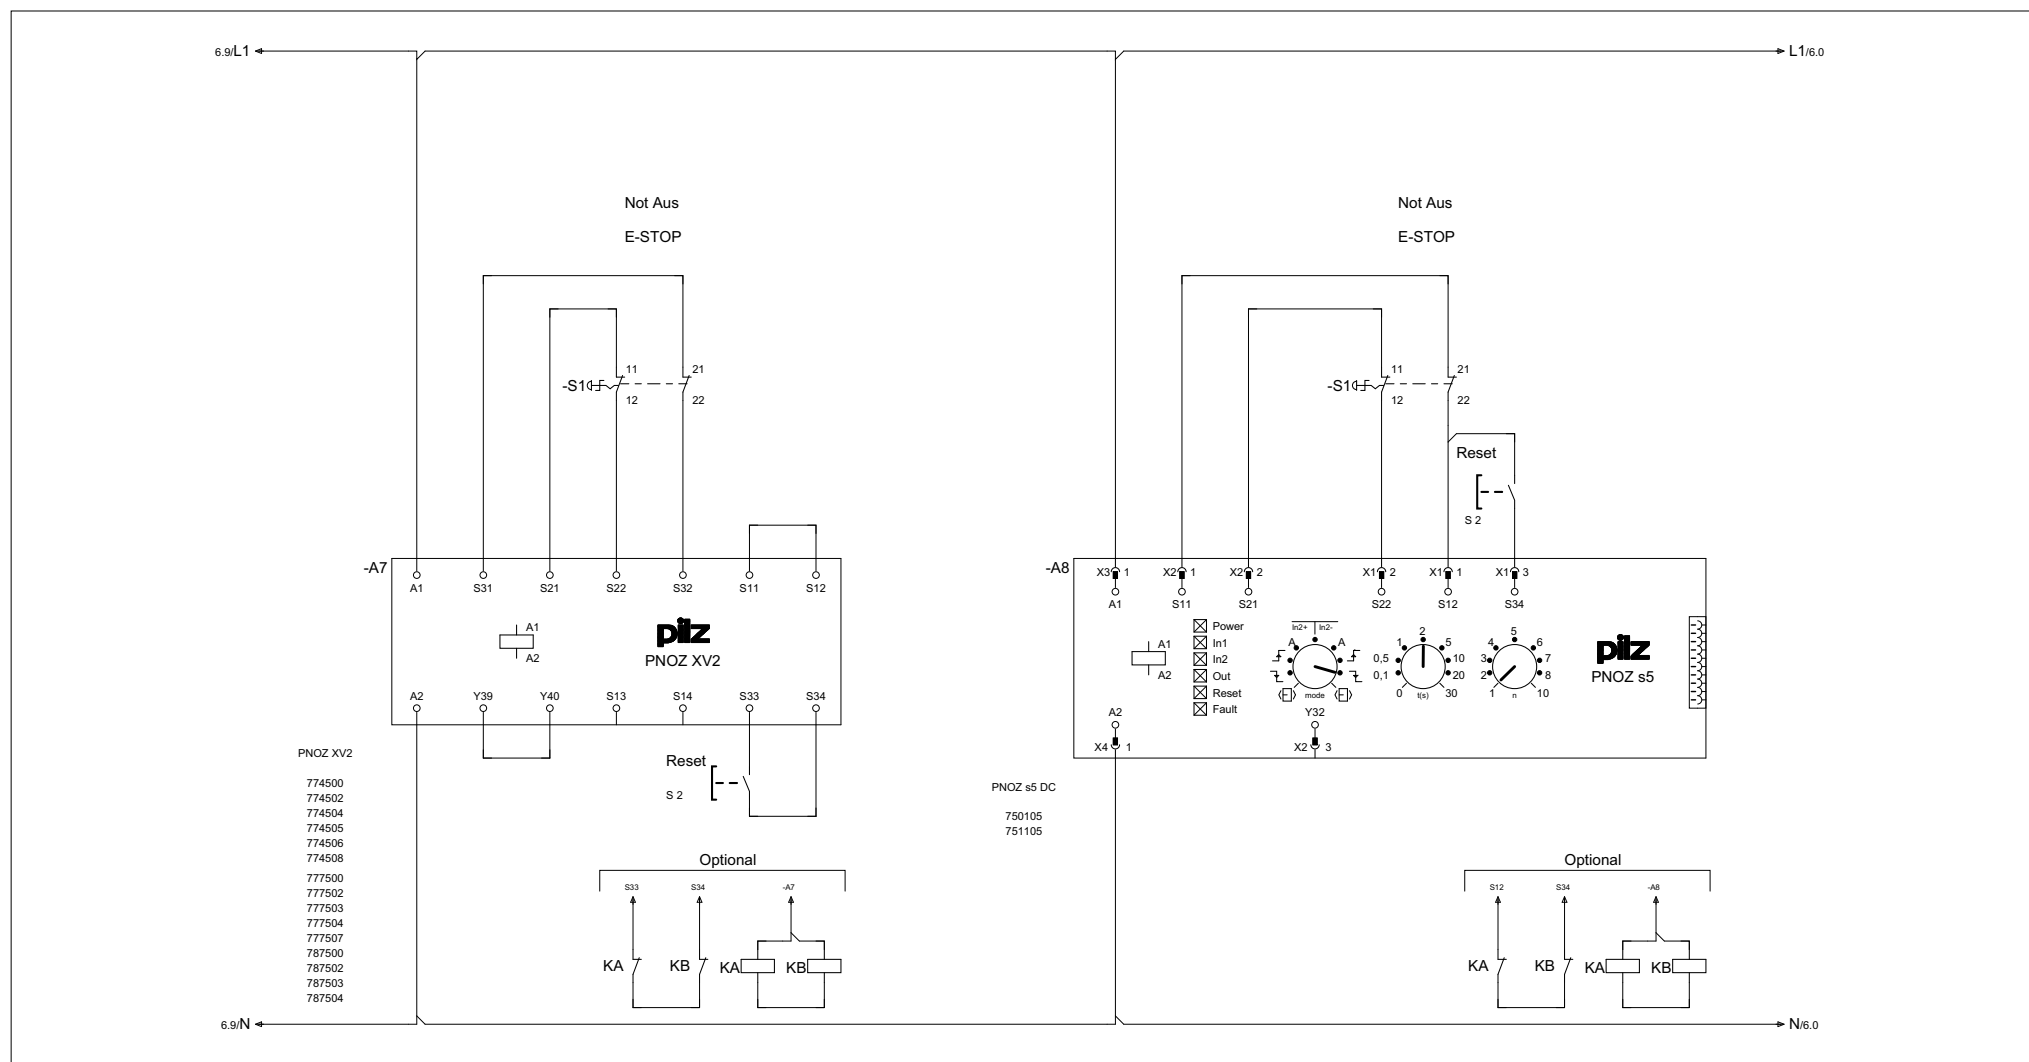


PNOZ XV2.1/PNOZ XV2.1P (48 - 240 V AC) – PNOZ s5

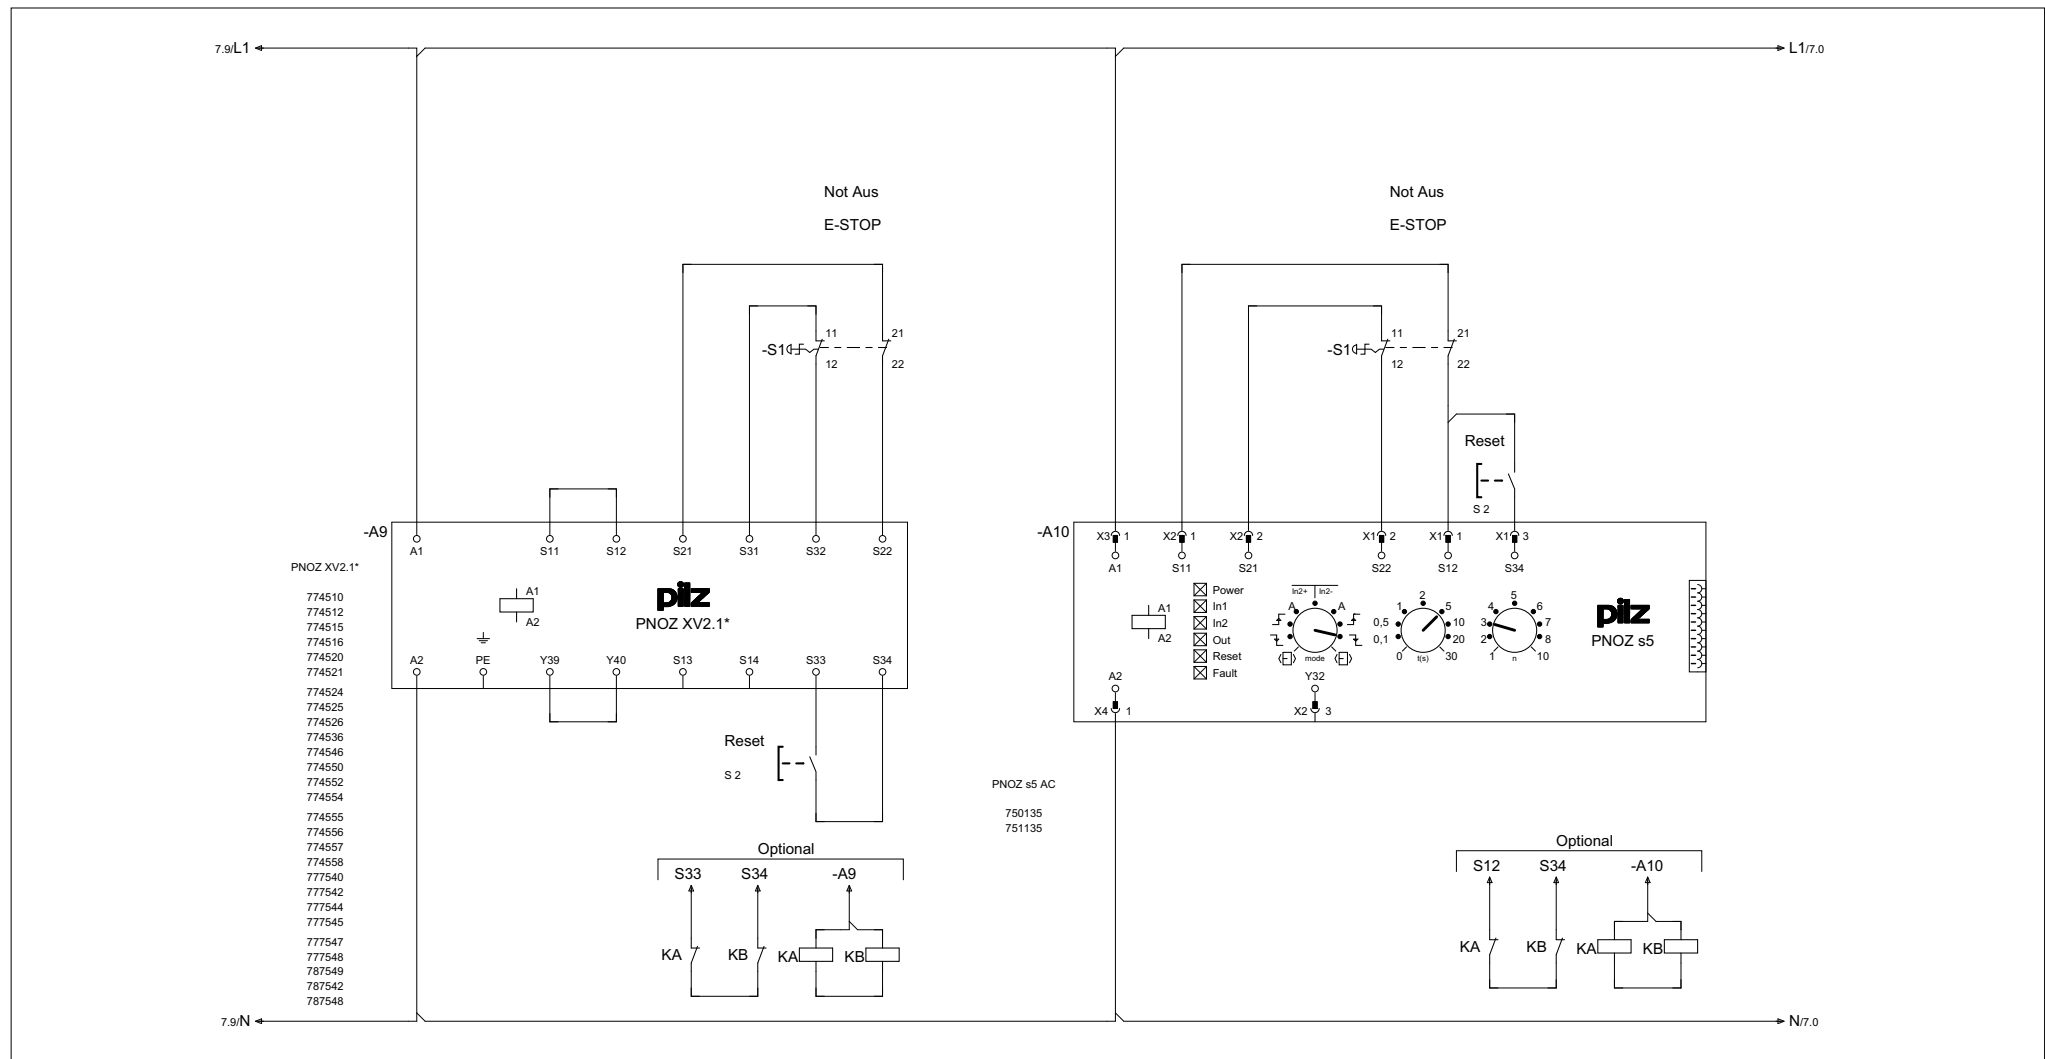


PNOZ X3/PNOZ X3P (24 V DC; 48 - 240 V AC/DC) – PNOZ s4

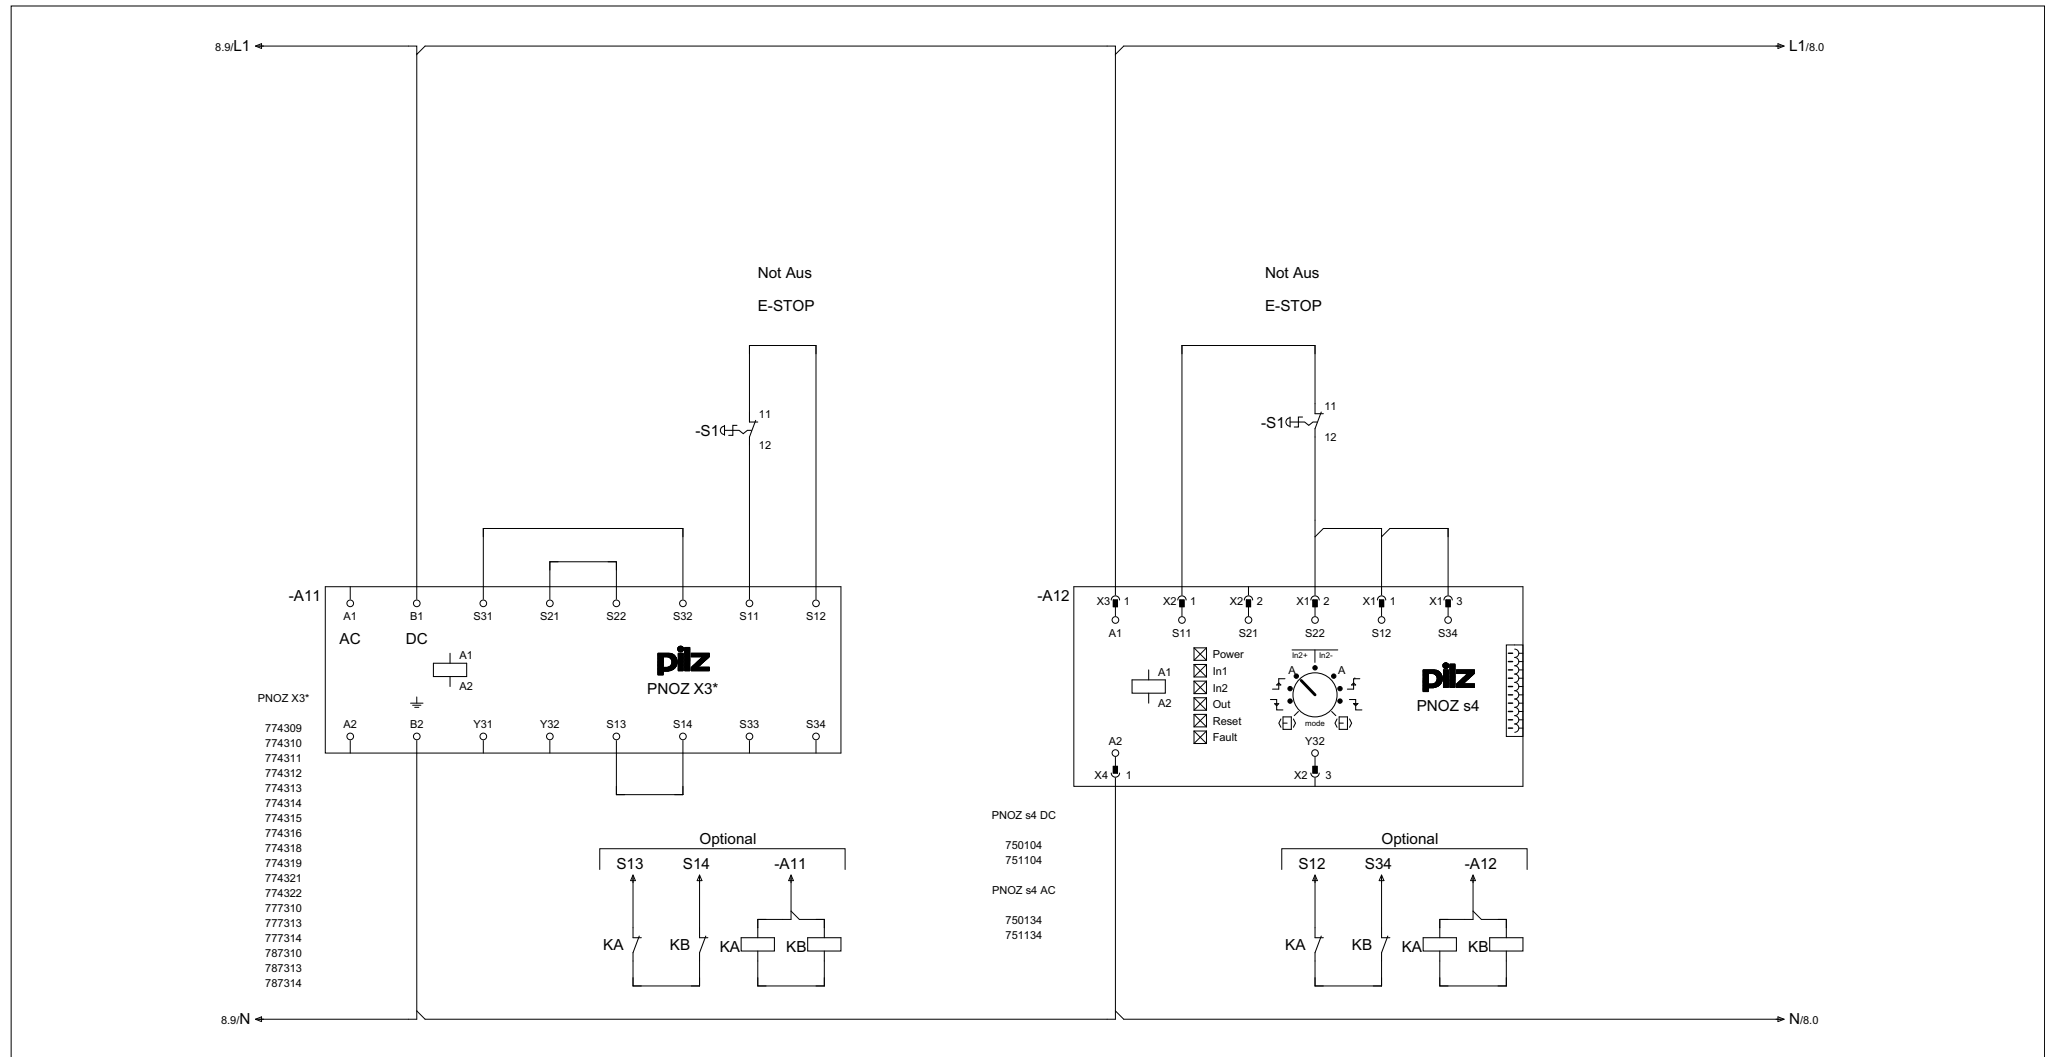


PNOZ XV3/PNOZ XV3P (24 V DC) – PNOZ s5 and expander module PNOZ s7

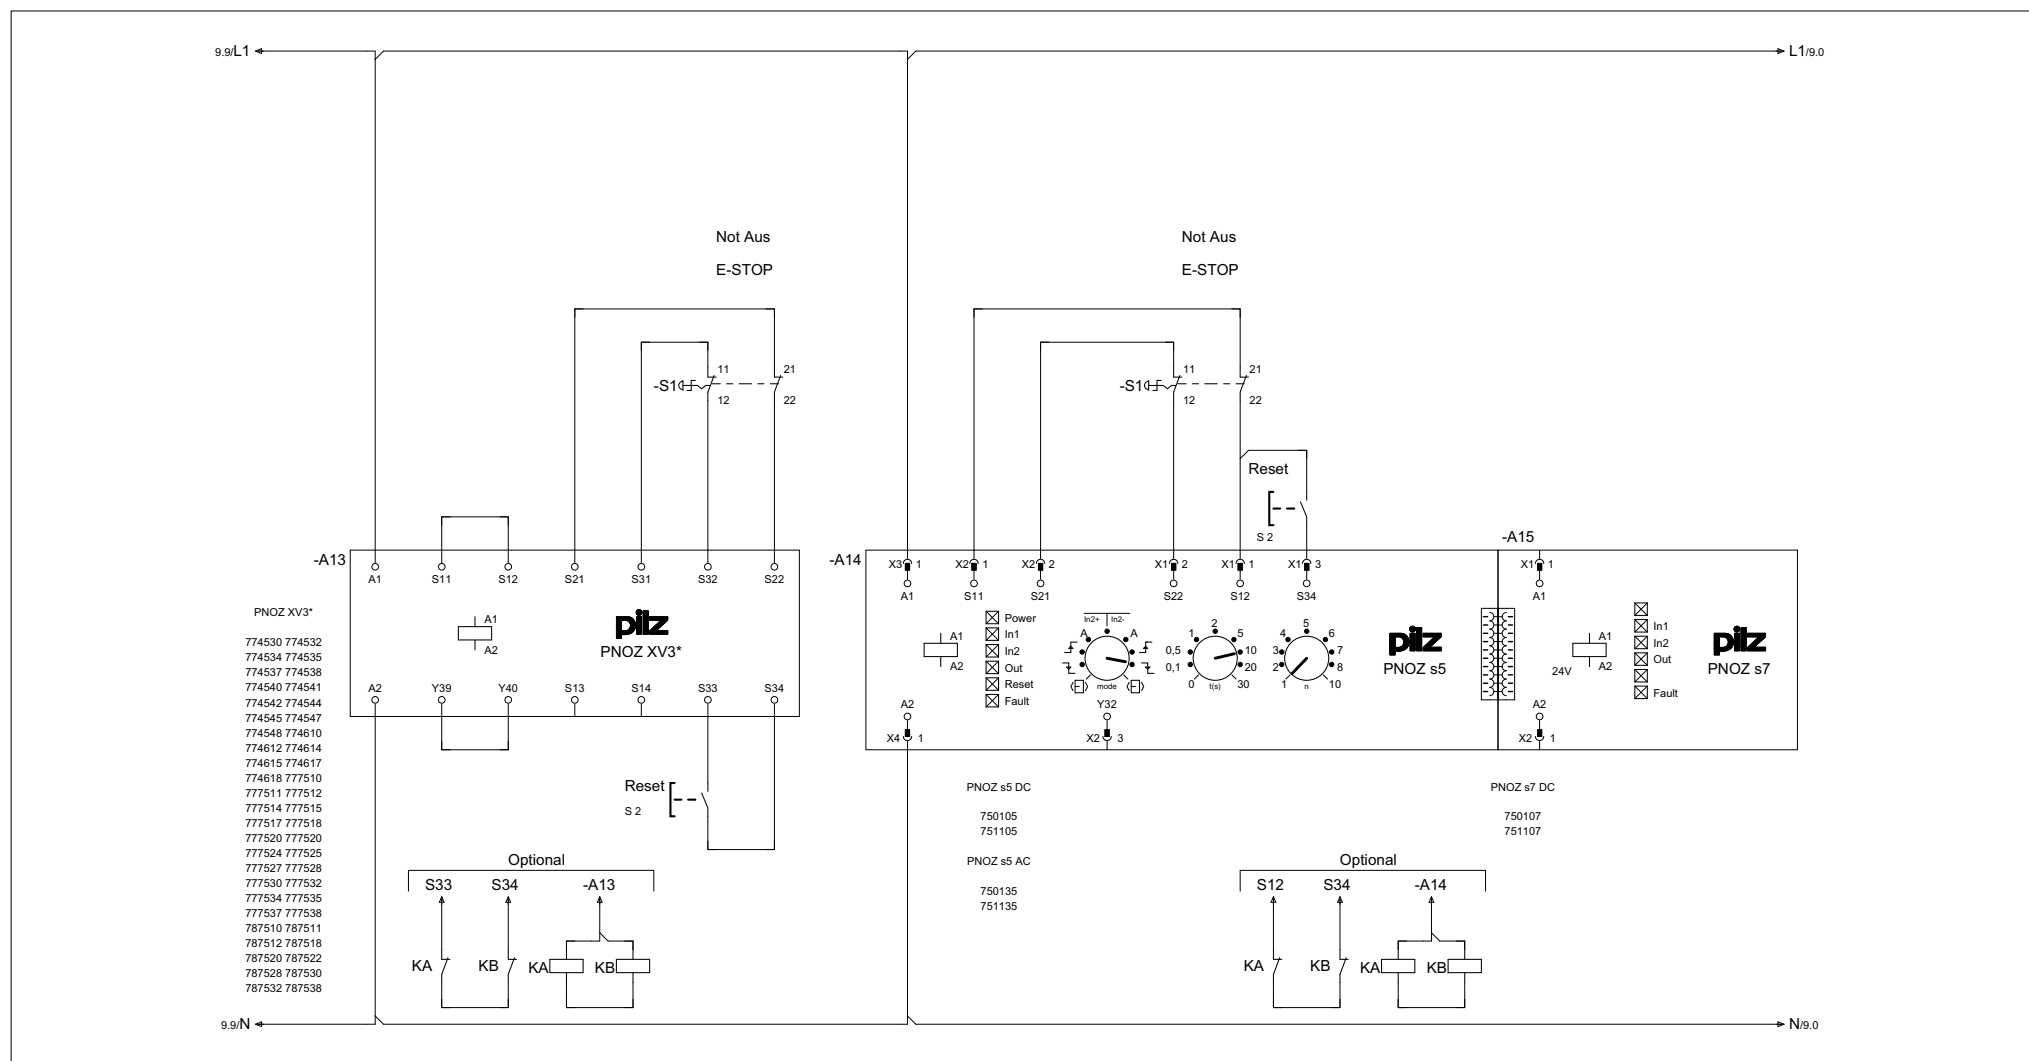


PNOZ X4 (24 V DC; 48 - 240 V AC) – PNOZ s4

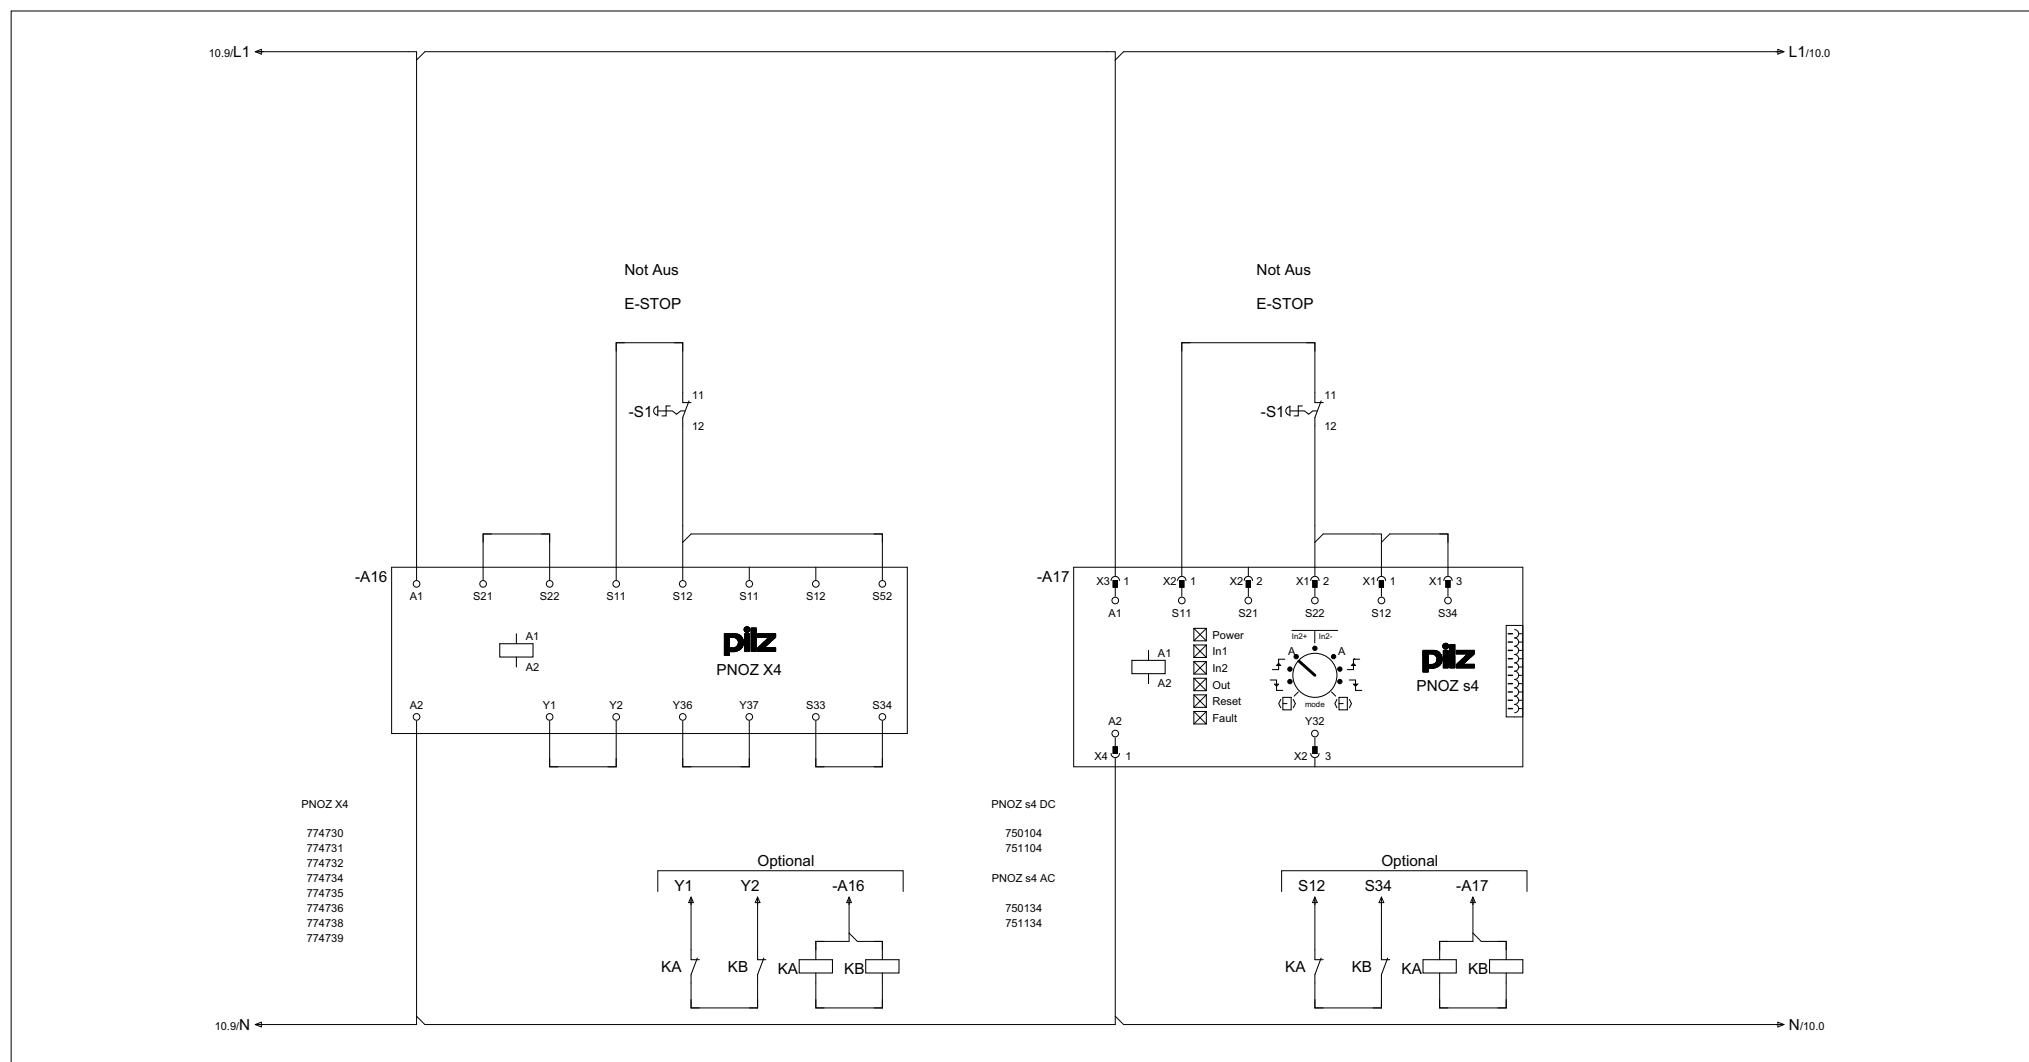


PNOZ X5 (24 V DC) – PNOZ s3

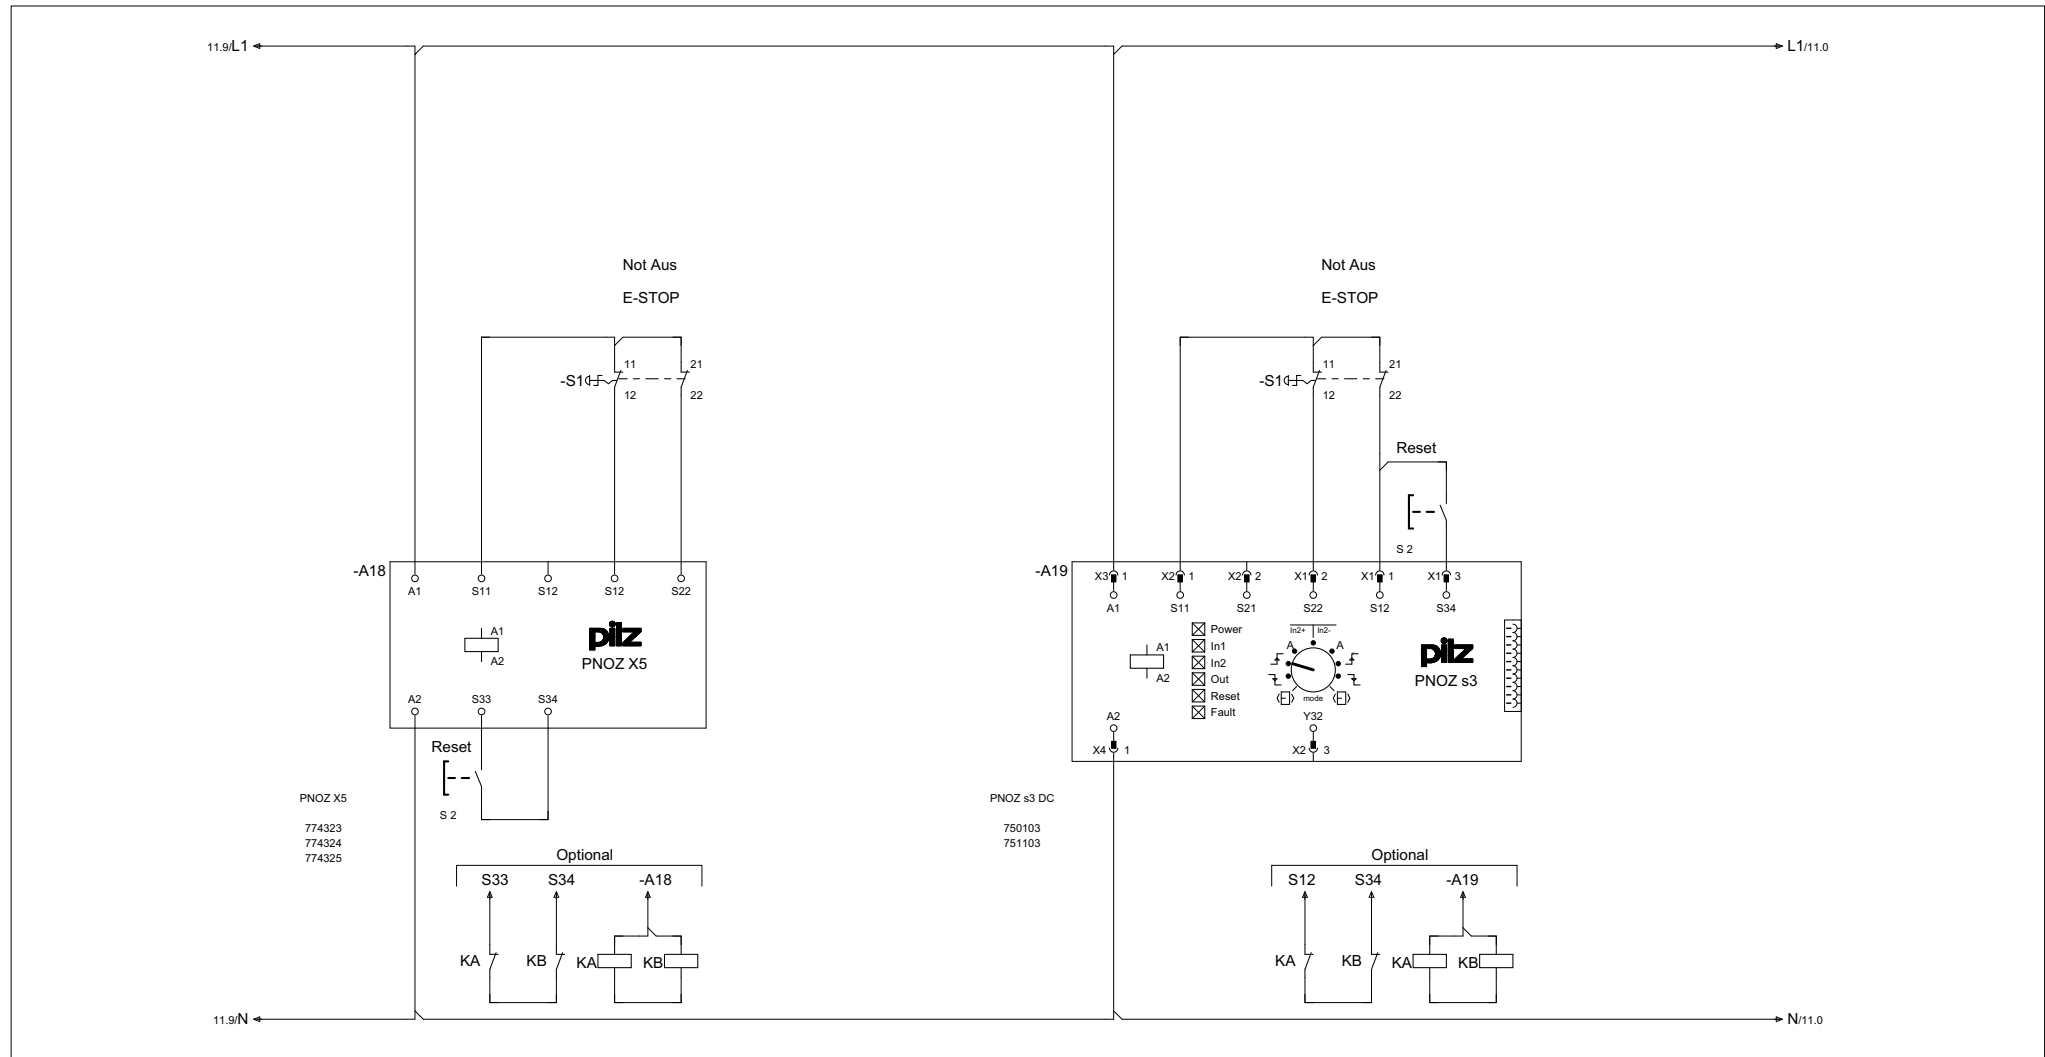


PNOZ X6 (24 V DC; 48 - 240 V AC) – PNOZ s4

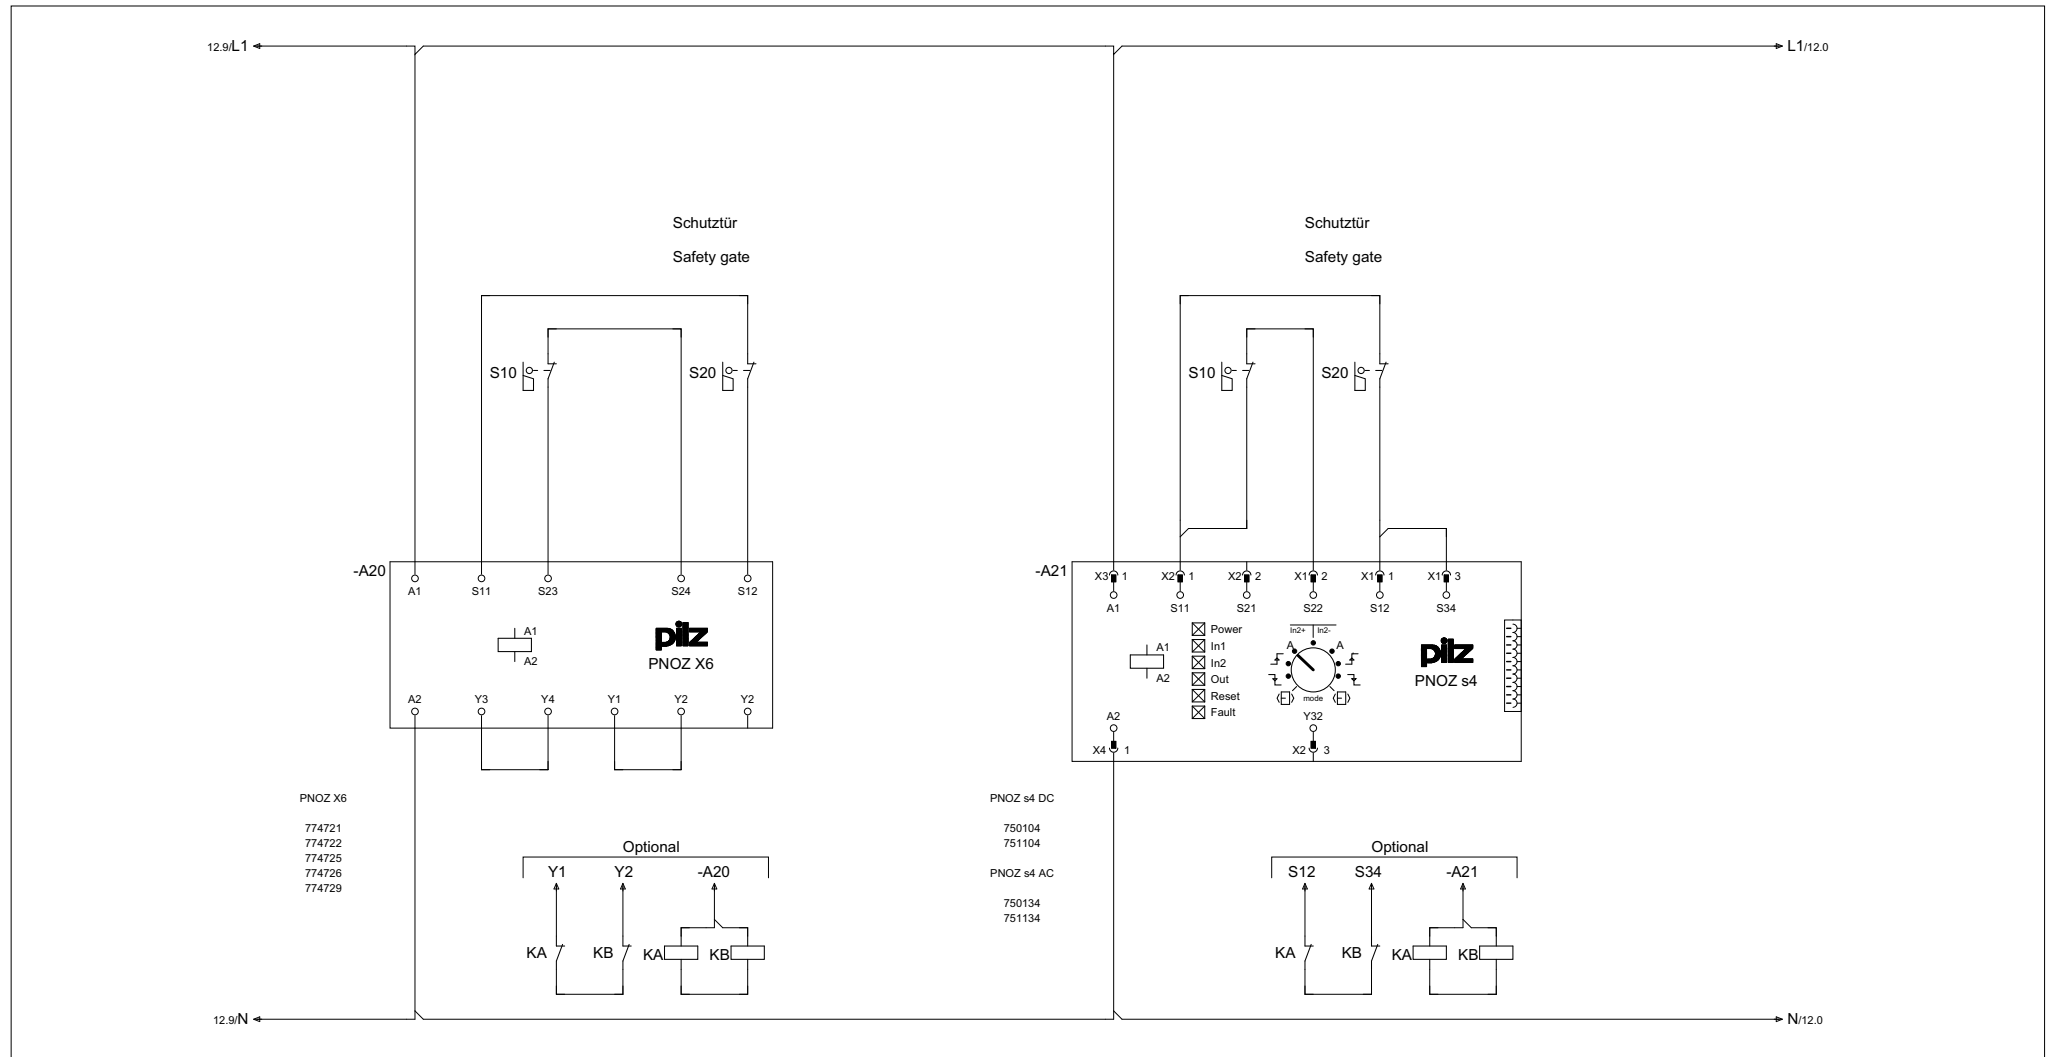

PNOZ X7/PNOZ X7P (24 V DC) – PNOZ s1

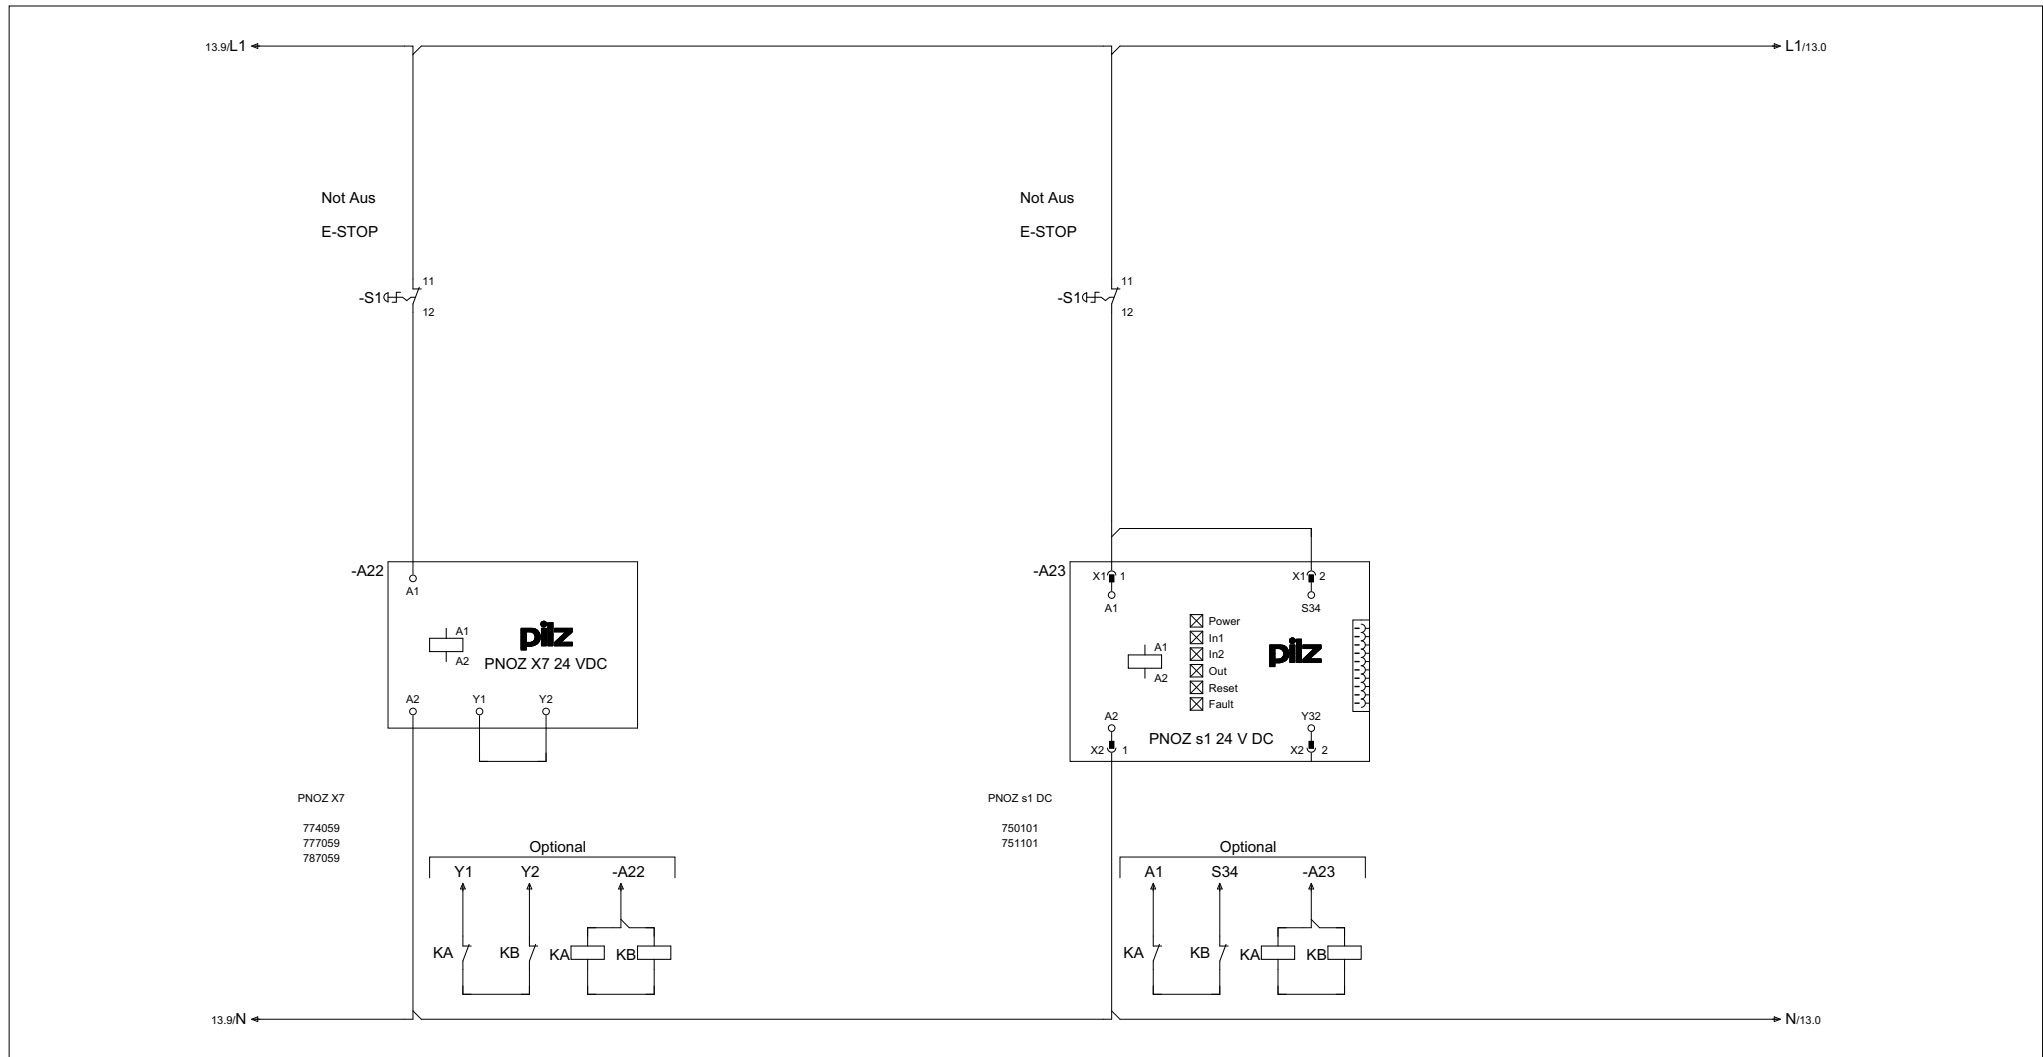

PNOZ X8P (24 V DC; 48 - 240 V AC) – PNOZ s4

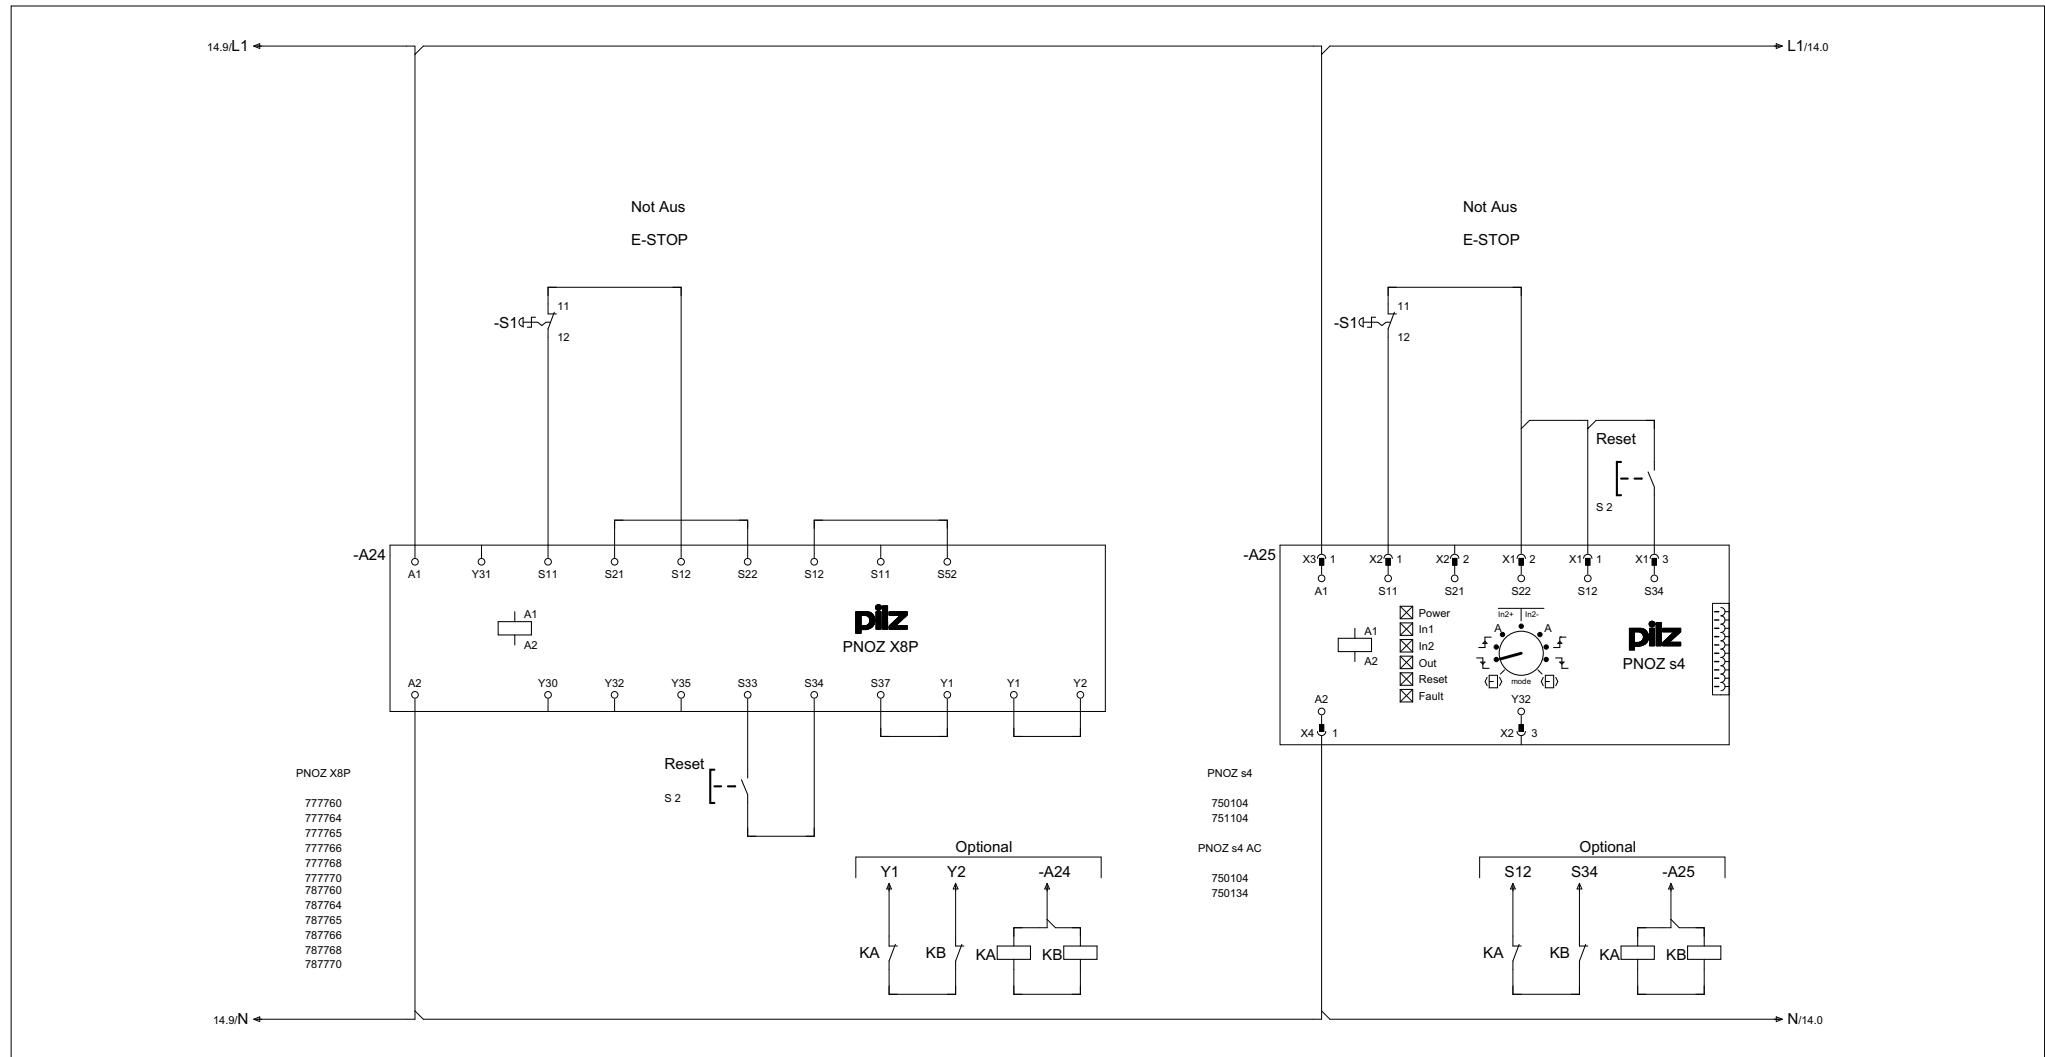




2.1







PNOZ X13 (24 V DC) – PNOZ s3 and expander module PNOZ s7

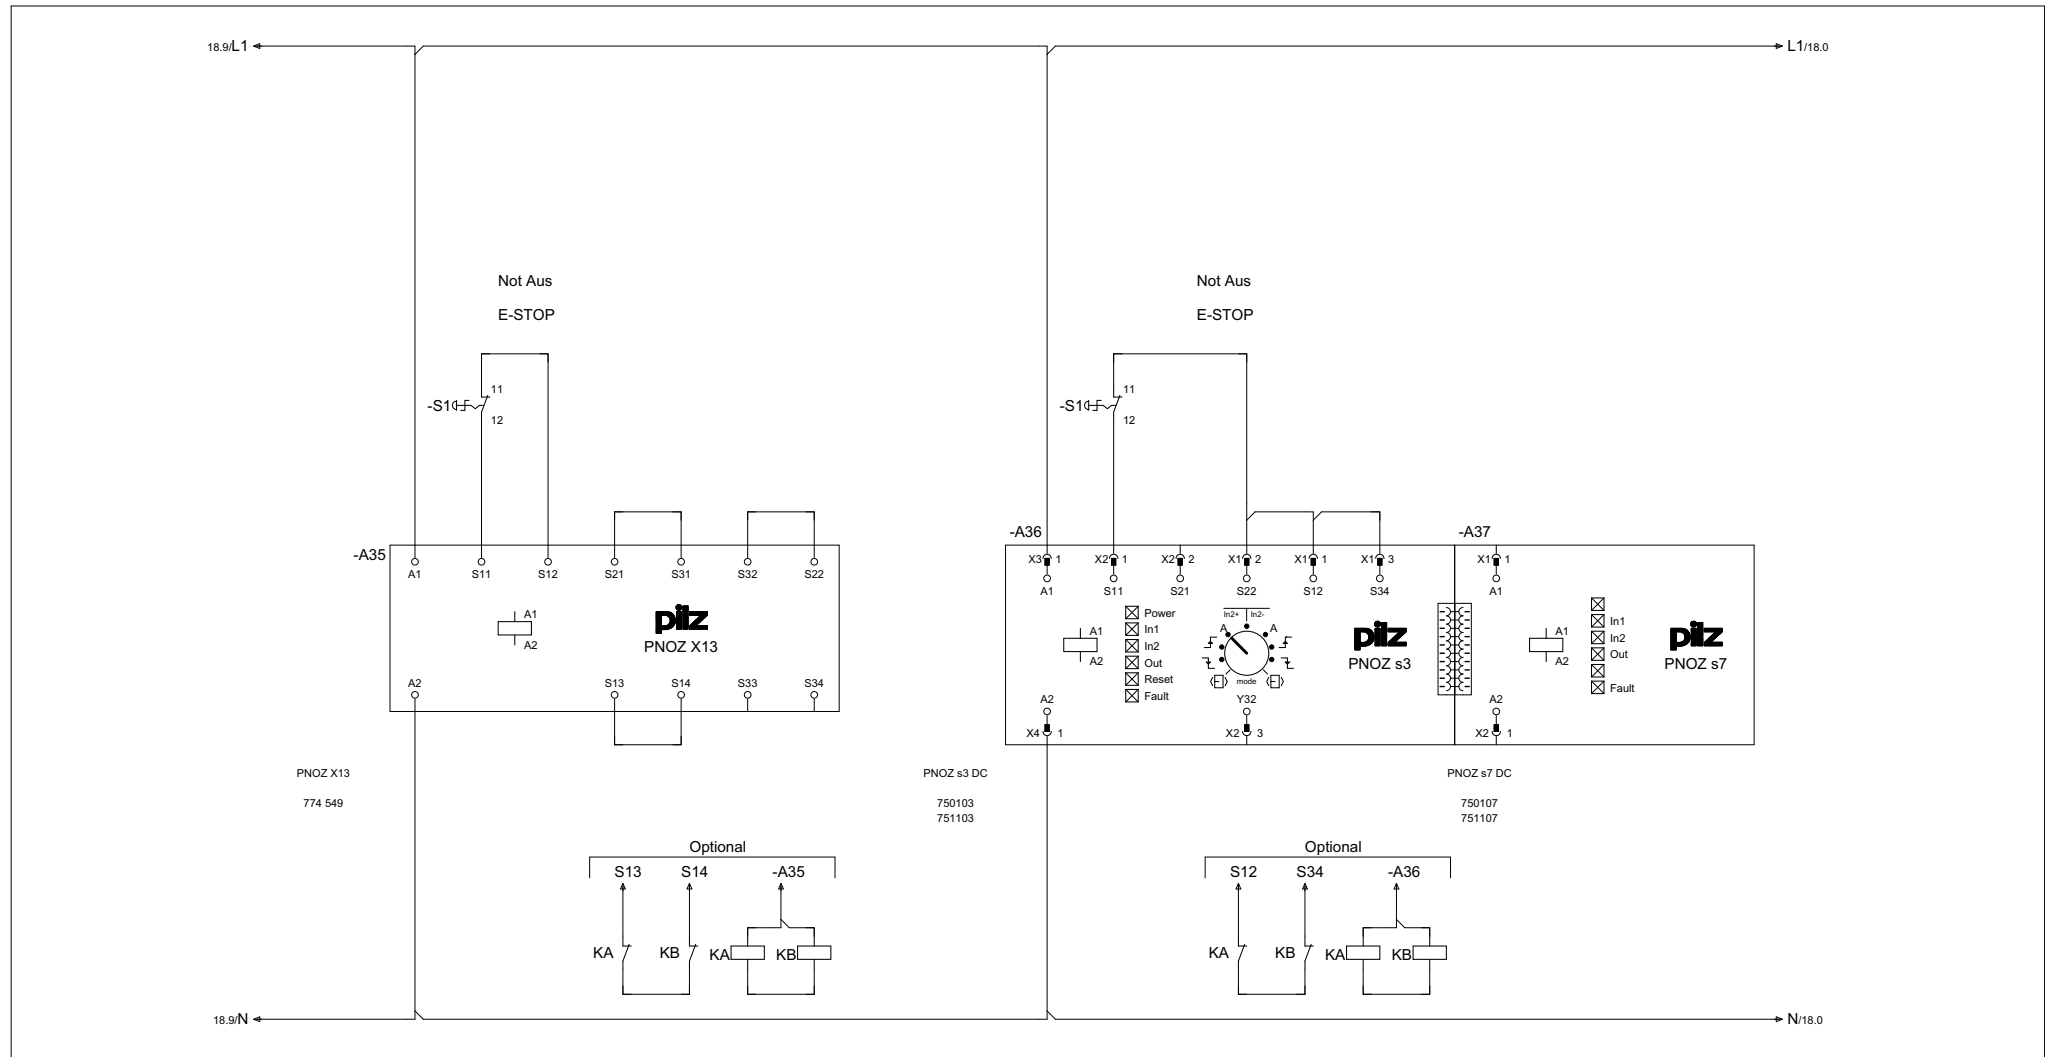

PNOZ 2VQ (24 V DC) – PNOZ s5 and expander module PNOZ s9

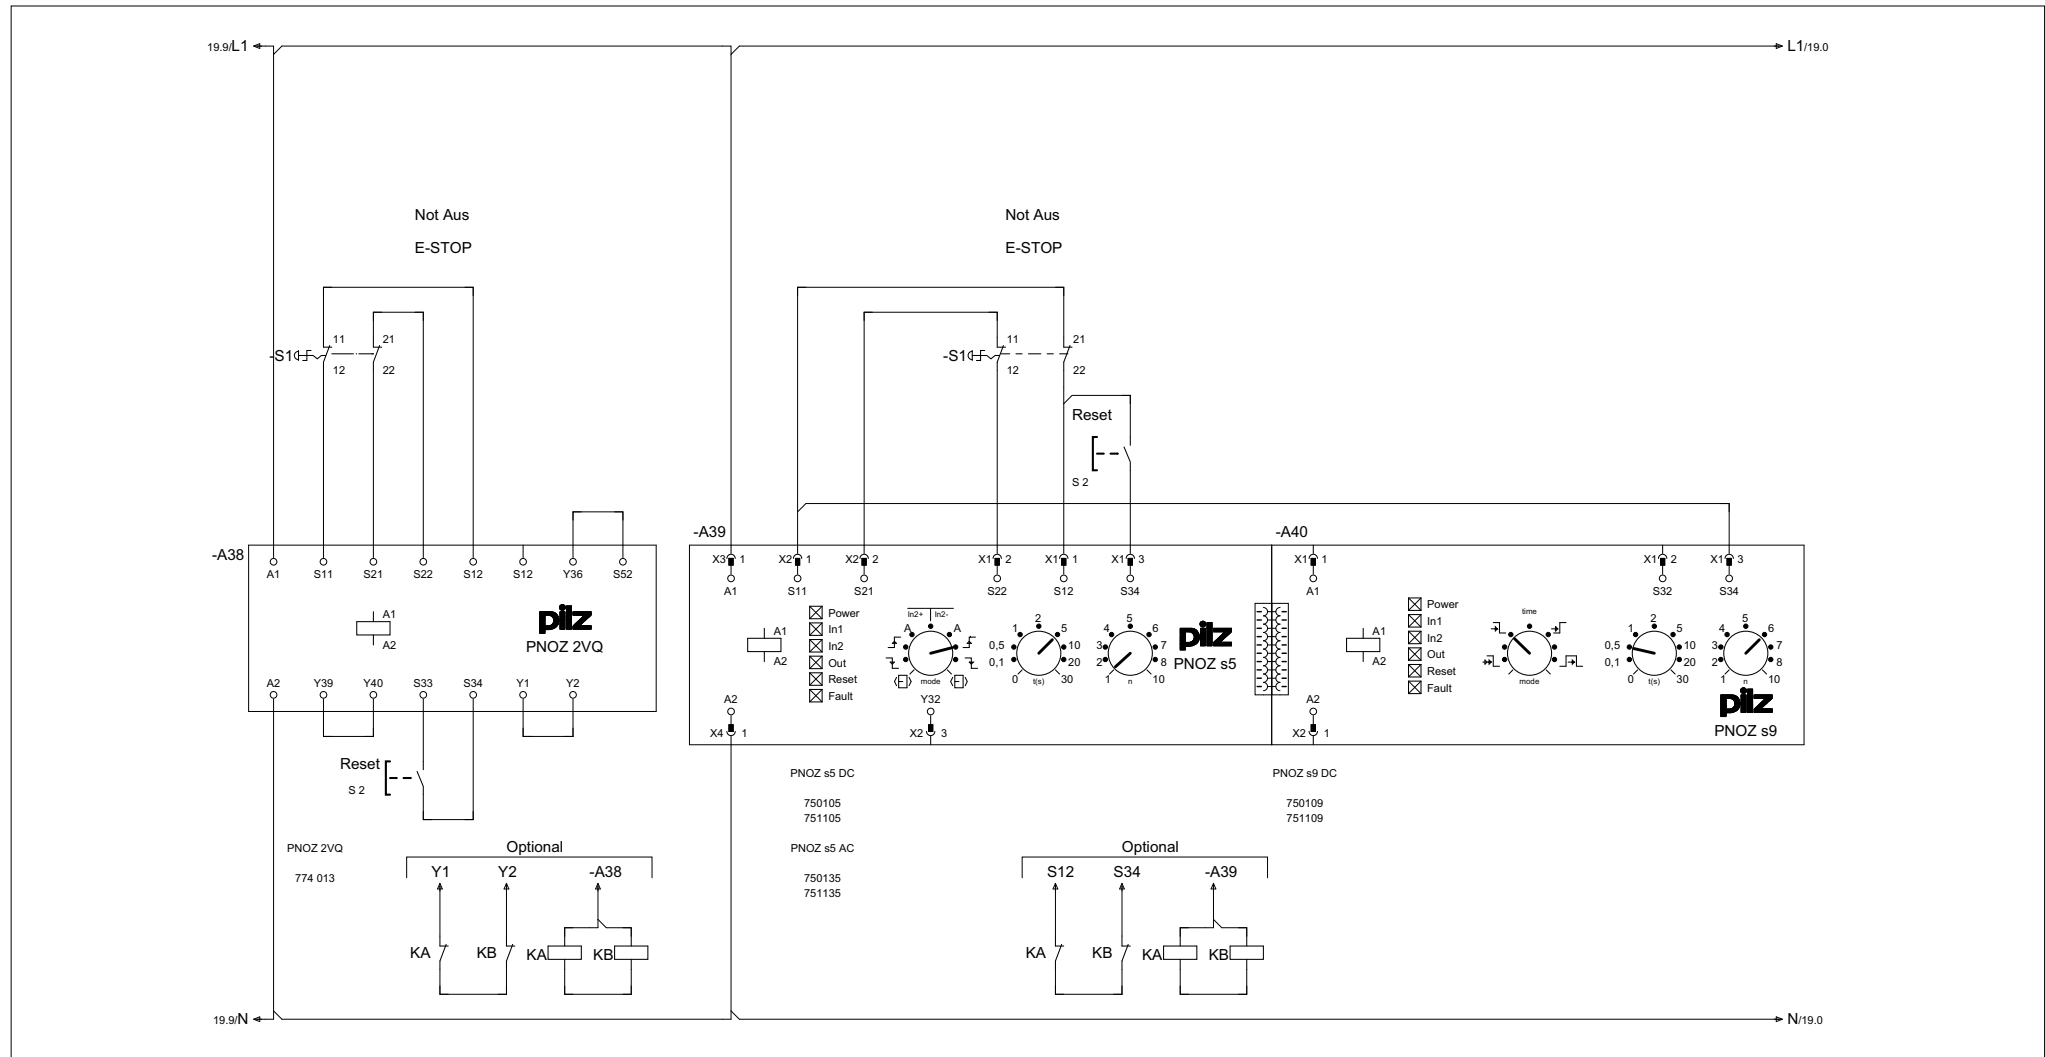

PNOZ 1-2 (24 V DC; 48 - 240 V AC) – PNOZ s4.1

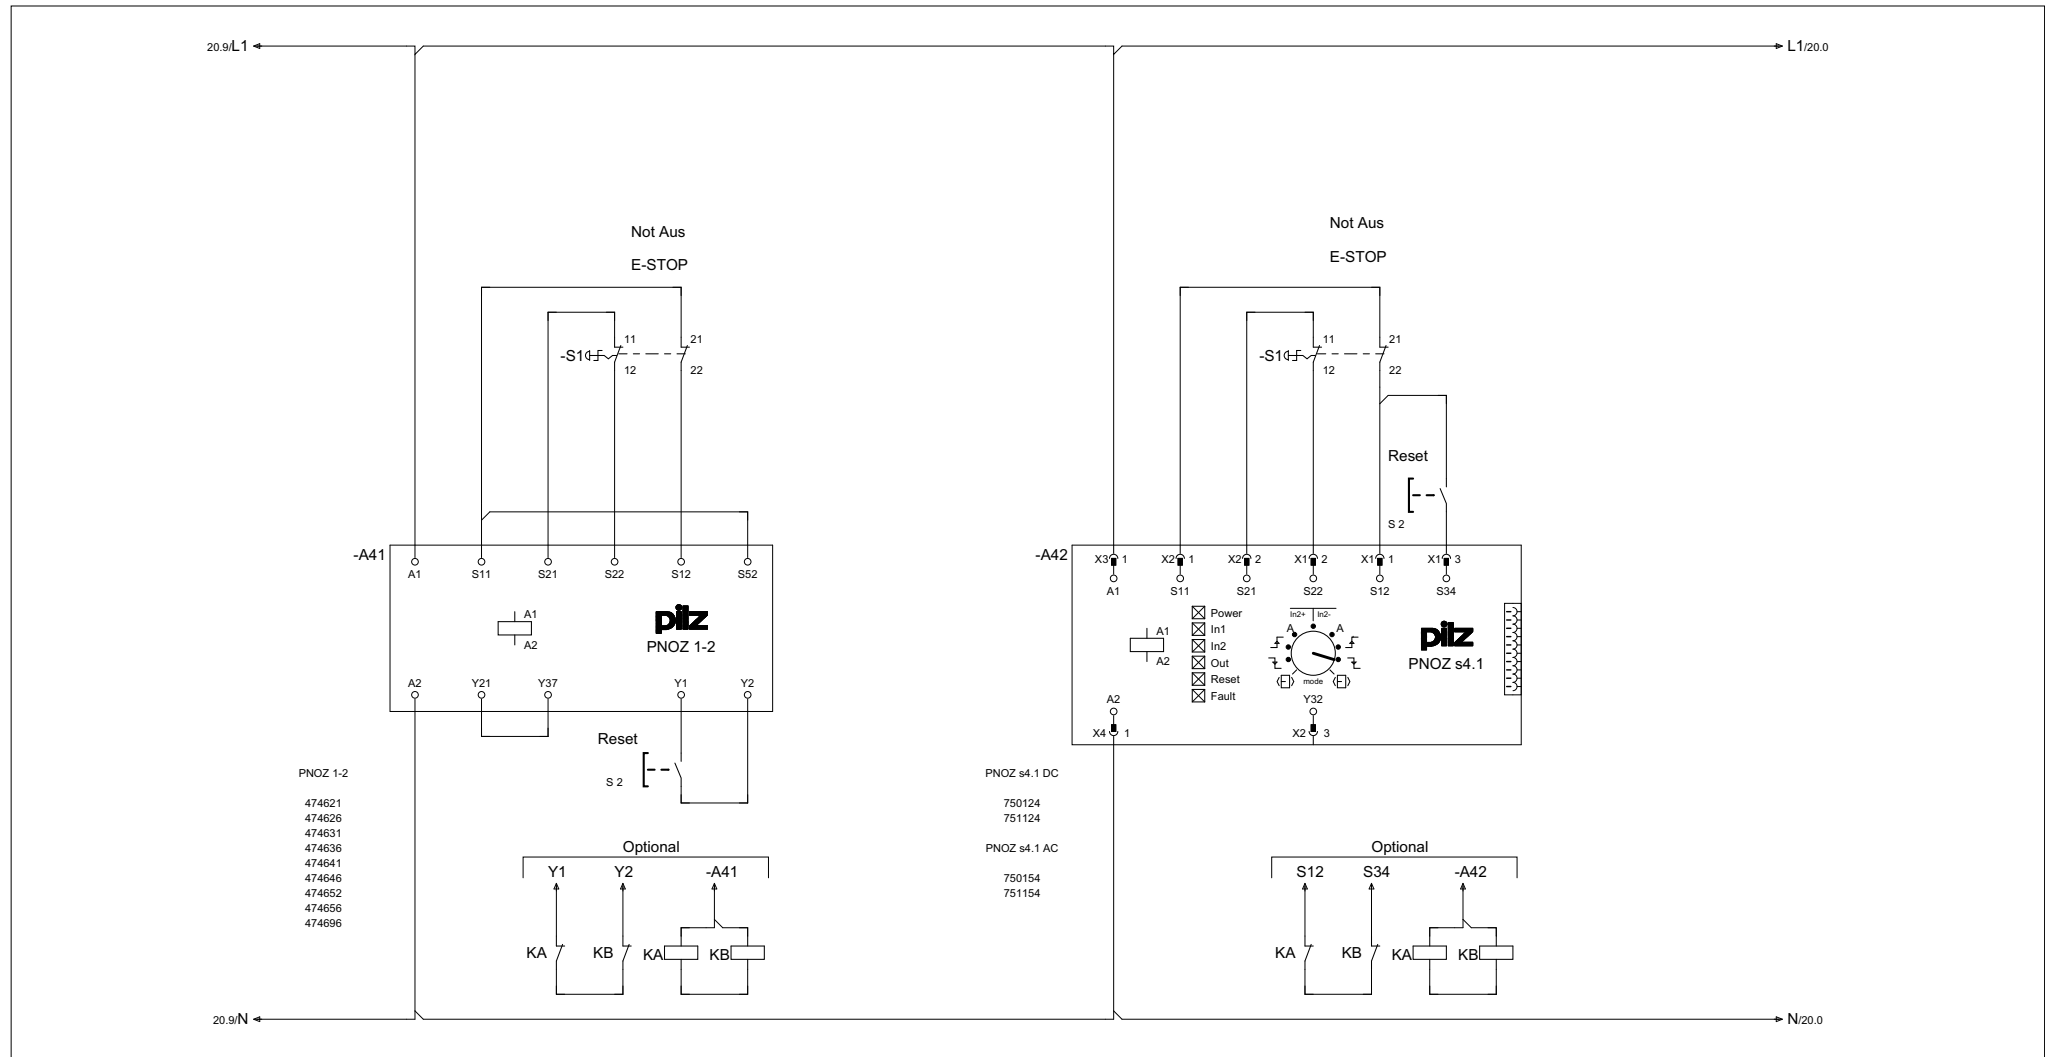



2.1







2.1



PST 4 (24 V DC; 48 - 240 V AC) – PNOZ s4 and expander module PNOZ s7

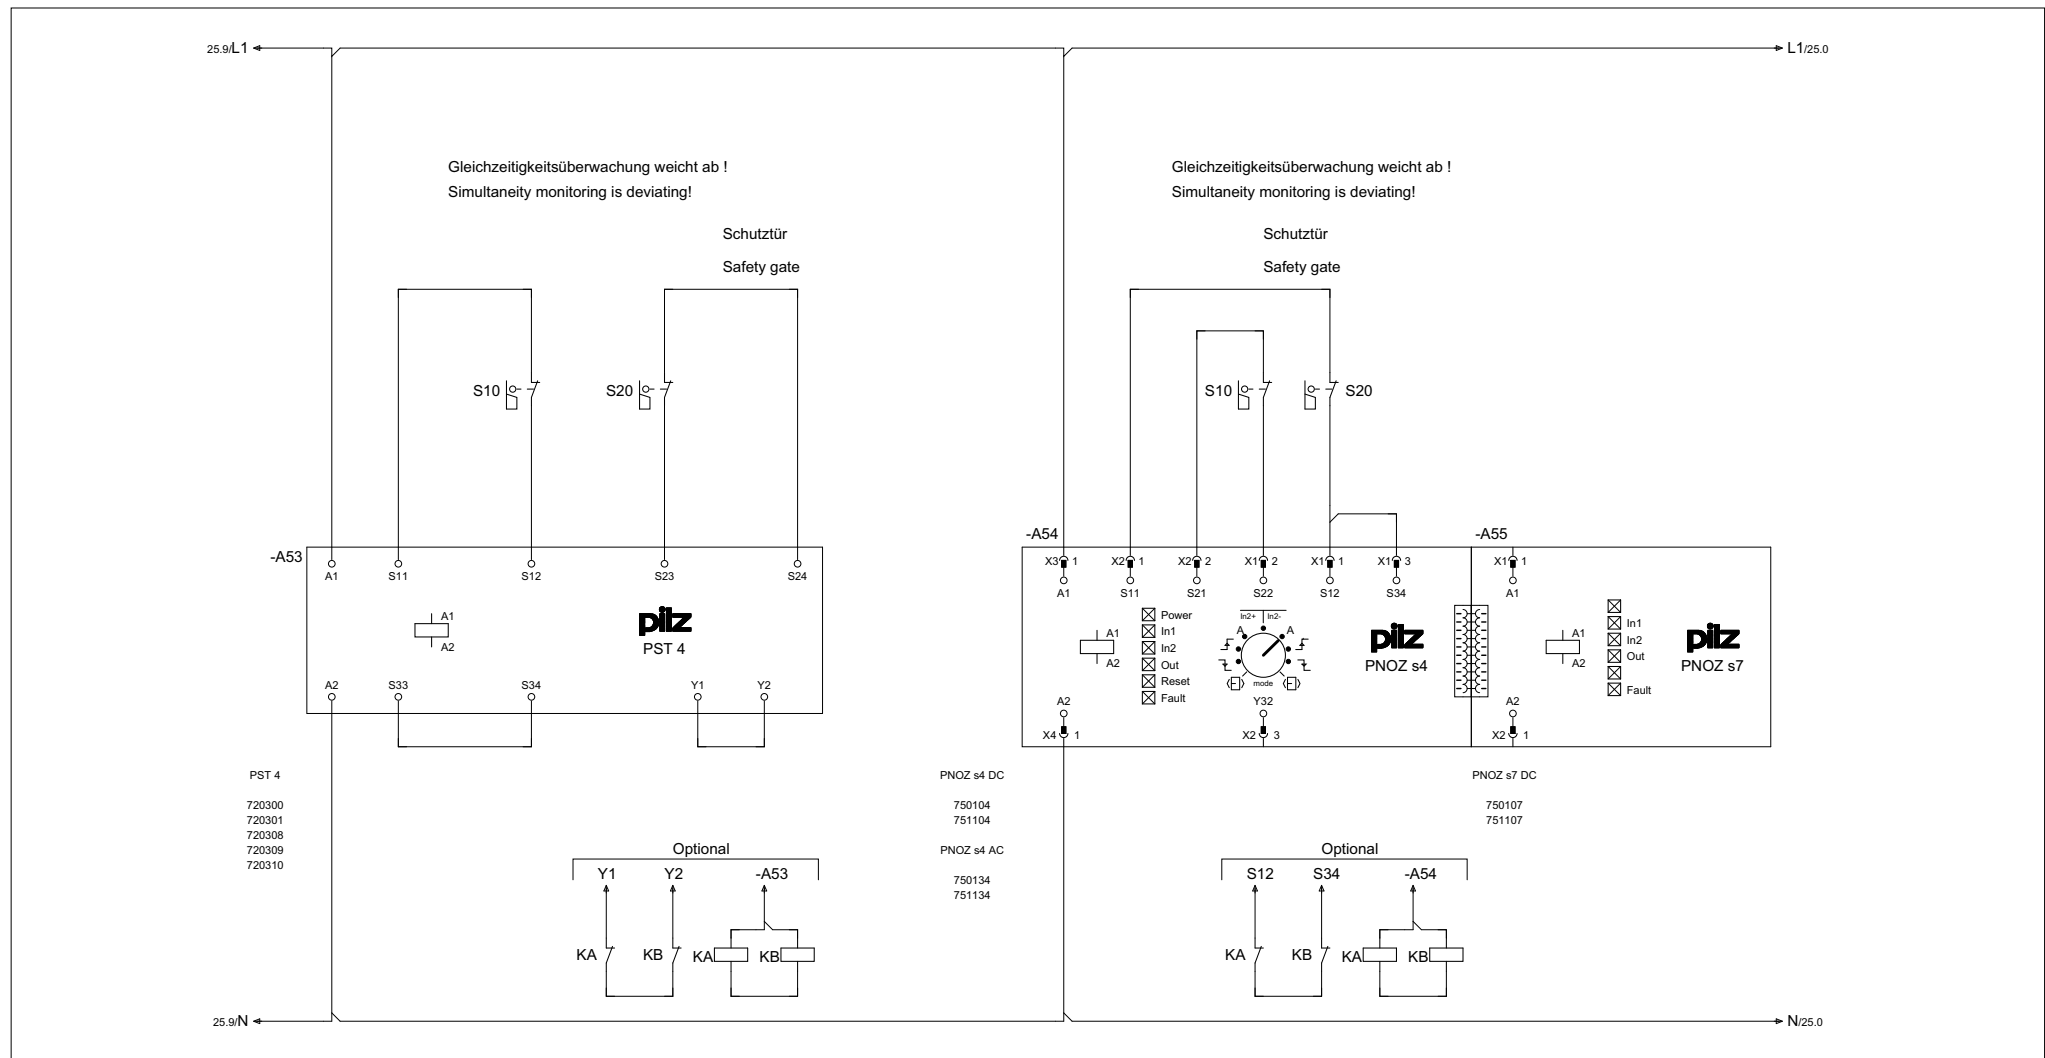


P1HZ X1 (24 V DC) – PNOZ s6.1

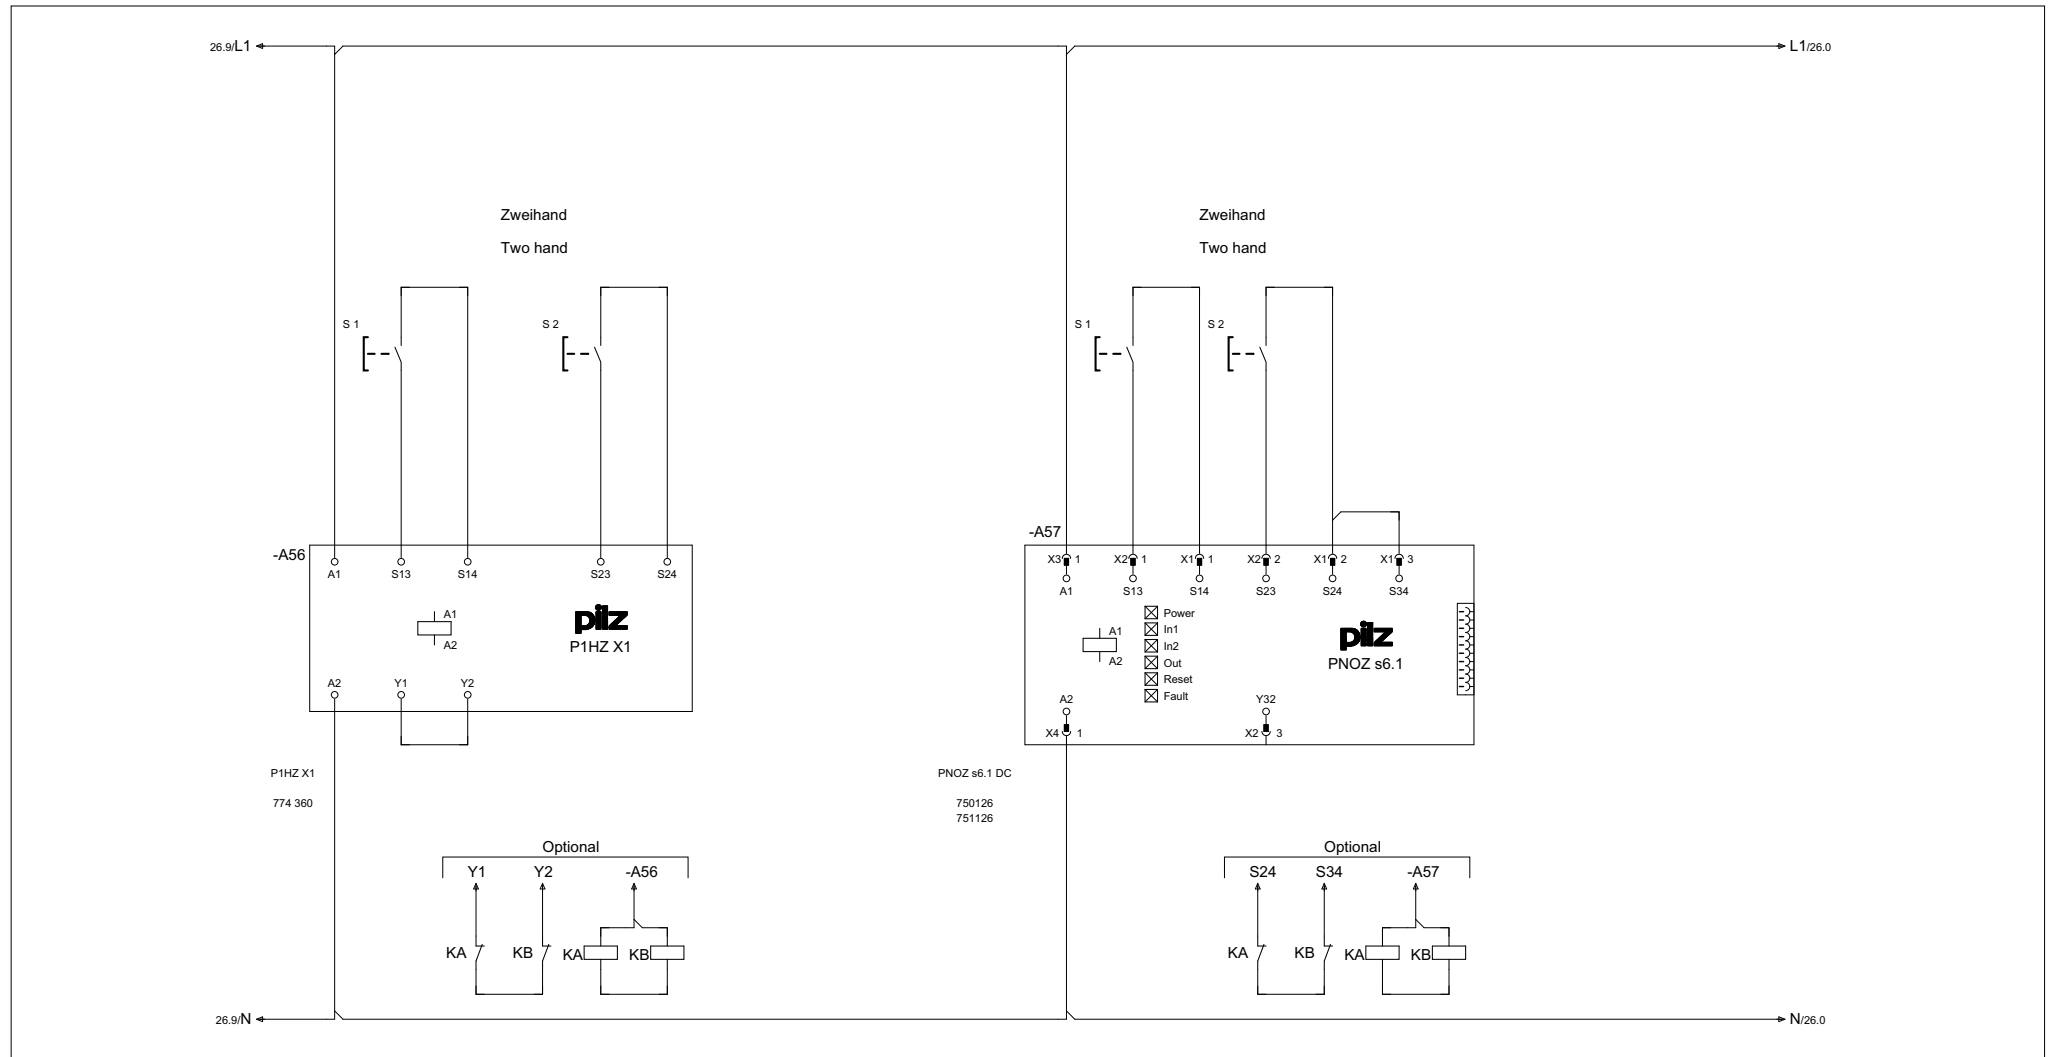




P2HZ X3 (24 V DC) – PNOZ s6

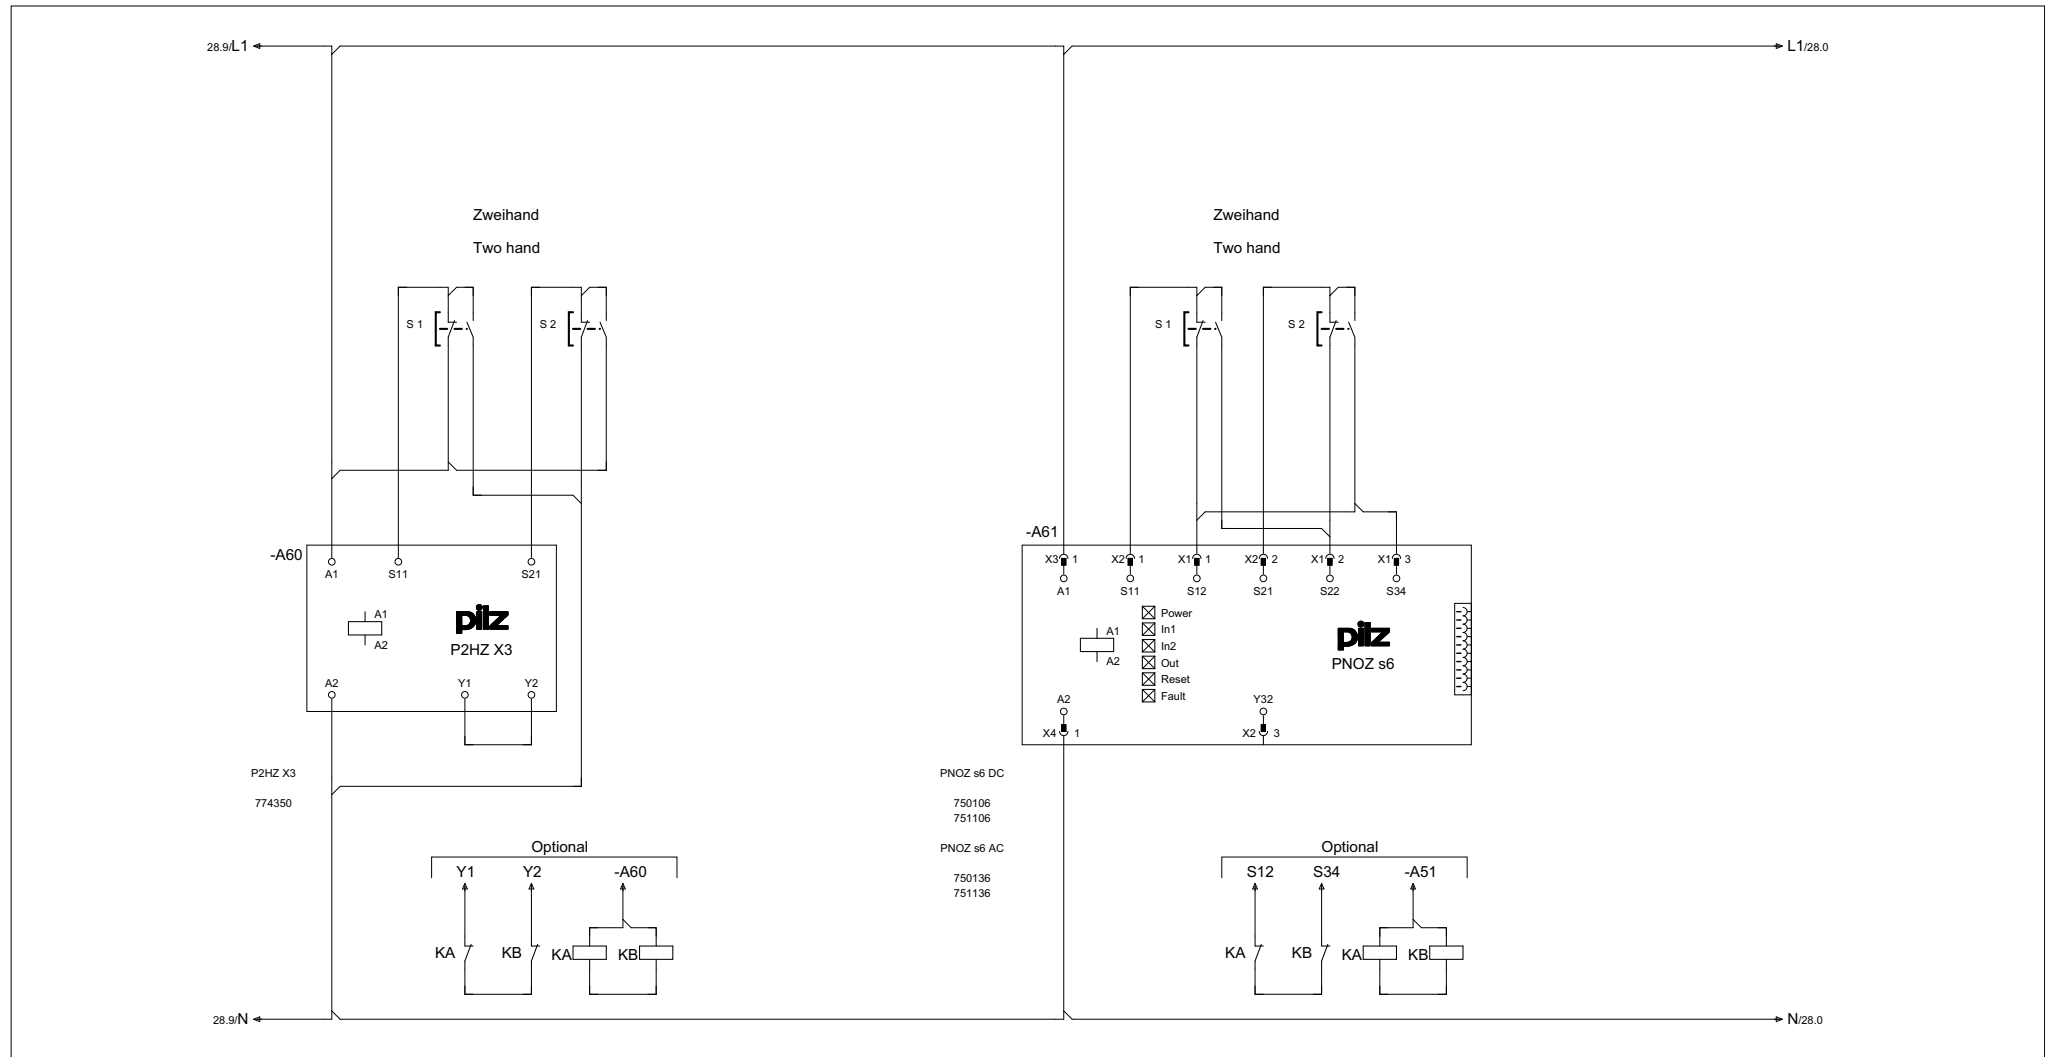

P2HZ X4P (24 V DC) – PNOZ s6

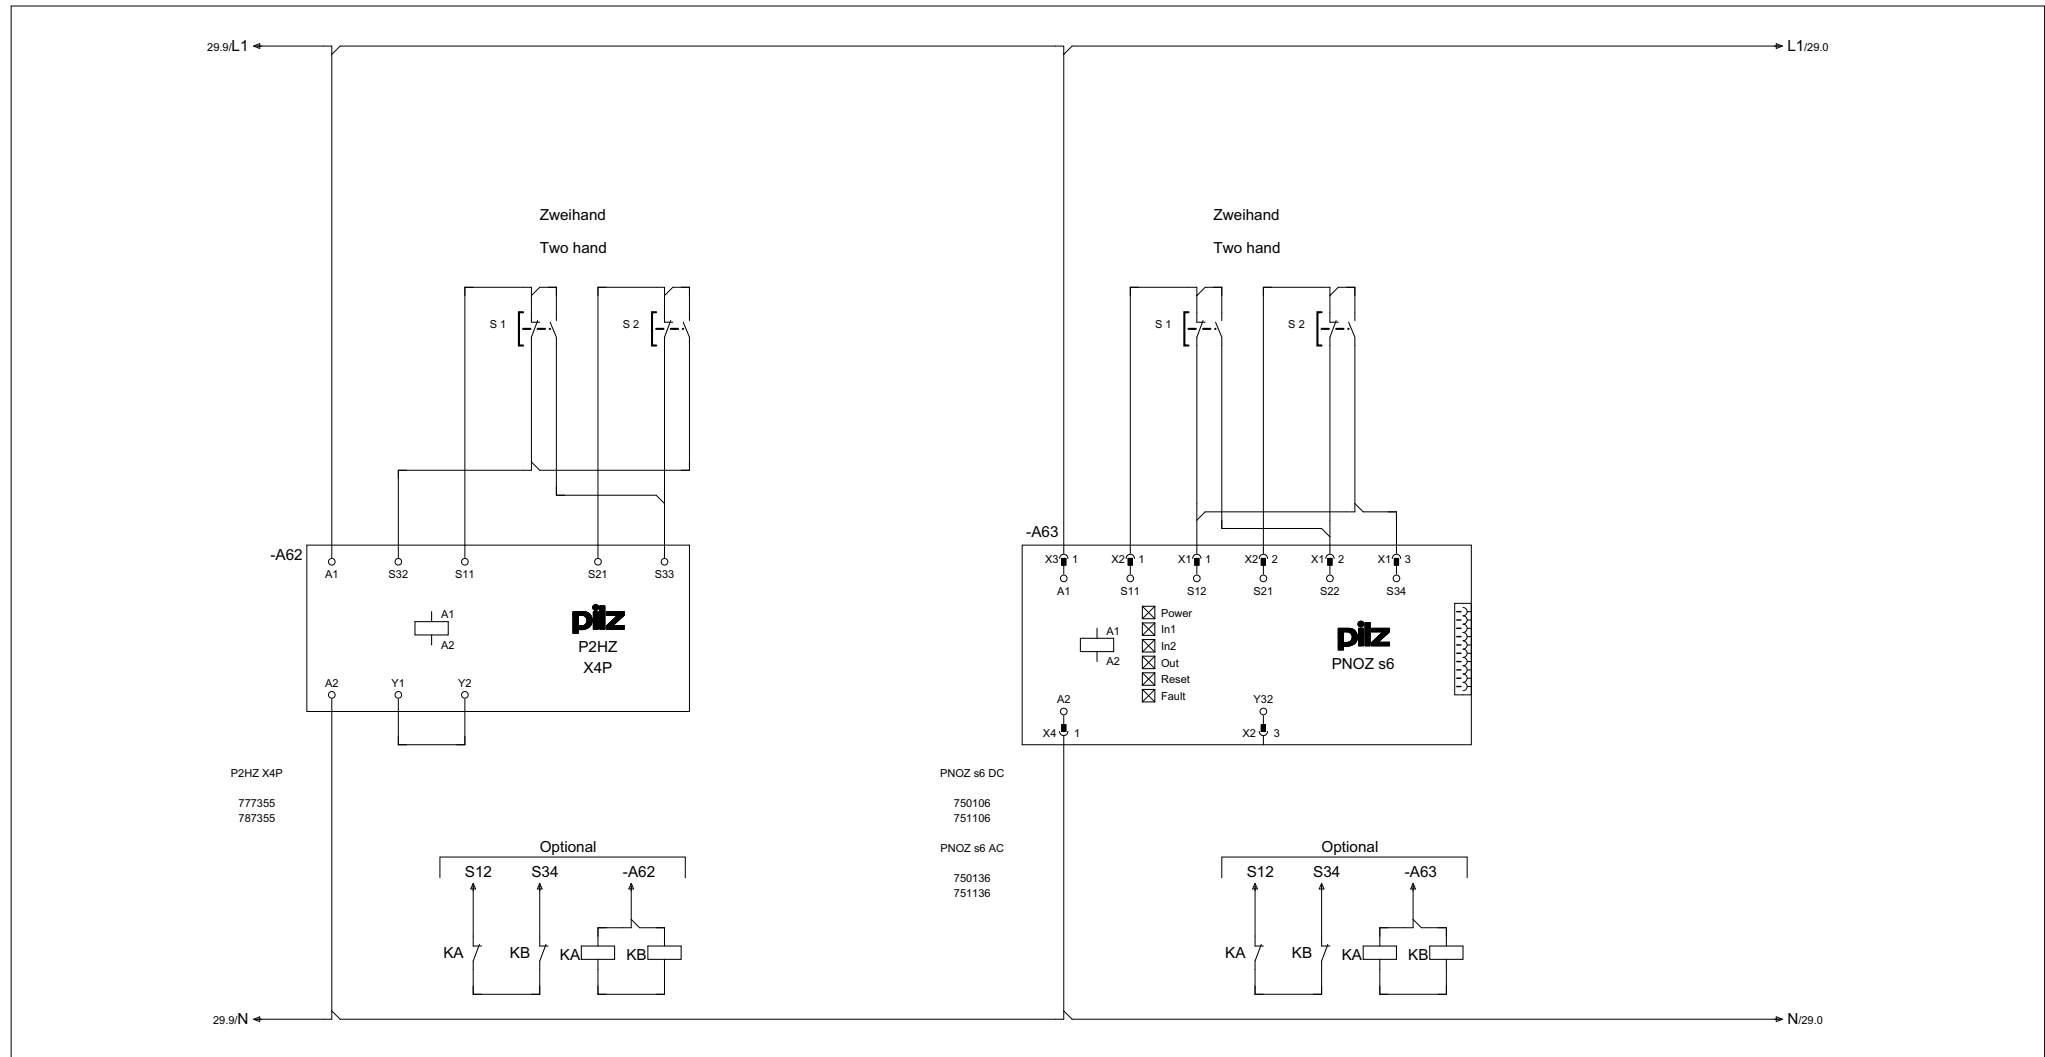

PST X2 (24 V DC) – PNOZ s4

